US00RE36189E

# United States Patent [19]

Carter et al.

[11] E Patent Number: Re. 36,189

[45] Reissued Date of Patent: Apr. 13, 1999

[54] **APPARATUS FOR REDUCING COMPUTER SYSTEM POWER CONSUMPTION**

[75] Inventors: **Robert R. Carter**, Cypress; **Paul M. Garner**, The Woodlands; **Darren J. Cepulis**; **Carrie Boone**, both of Houston, all of Tex.

[73] Assignee: **Compaq Computer Corporation**, Houston, Tex., TX

[21] Appl. No.: **07/993,093**

[22] Filed: **Dec. 18, 1992**

**Related U.S. Patent Documents**

Reissue of:

[64] Patent No.: **4,980,836**
Issued: **Dec. 25, 1990**
Appl. No.: **07/257,954**
Filed: **Oct. 14, 1988**

[51] **Int. Cl.**[6] ..... **G06F 1/32**; G01R 19/00

[52] **U.S. Cl.** ..... **395/750.06**; 395/750.05; 395/750.03

[58] **Field of Search** ..... 324/600, 76.11; 395/750.06, 750.05, 750.03, 750.01; 702/57, 60, 63, 64

[56] **References Cited**

U.S. PATENT DOCUMENTS

| | | | |
|---|---|---|---|
| 3,941,989 | 3/1976 | McLaughlin et al. . | |
| 4,203,153 | 5/1980 | Boyd . | |
| 4,285,043 | 8/1981 | Hashimoto et al. . | |
| 4,293,927 | 10/1981 | Hoshii . | |
| 4,316,247 | 2/1982 | Iwamoto . | |
| 4,317,181 | 2/1982 | Teza et al. . | |
| 4,365,290 | 12/1982 | Nelms et al. . | |
| 4,381,552 | 4/1983 | Nocilini et al. . | |
| 4,510,398 | 4/1985 | Culp et al. . | |
| 4,518,961 | 5/1985 | Davis et al. | 340/825.44 |
| 4,538,231 | 8/1985 | Abe et al. . | |
| 4,545,030 | 10/1985 | Kitchin . | |
| 4,568,934 | 2/1986 | Allgood . | |
| 4,568,988 | 2/1986 | McGinlay et al. . | |
| 4,615,005 | 9/1986 | Maejima et al. . | |
| 4,635,145 | 1/1987 | Horie et al. . | |
| 4,649,373 | 3/1987 | Bland et al. . | |
| 4,654,821 | 3/1987 | Lapp . | |
| 4,656,318 | 4/1987 | Noyes . | |
| 4,667,289 | 5/1987 | Yoshida et al. . | |
| 4,670,837 | 6/1987 | Sheets . | |
| 4,685,056 | 8/1987 | Barnsdale, Jr. et al. . | |
| 4,698,748 | 10/1987 | Juzswik et al. . | |
| 4,709,234 | 11/1987 | Forehand et al. . | |
| 4,751,653 | 6/1988 | Junk et al. . | |
| 4,835,706 | 5/1989 | Asahi | 364/492 |
| 4,851,987 | 7/1989 | Day . | |
| 4,922,450 | 5/1990 | Rose et al. . | |
| 4,933,795 | 6/1990 | Morehouse et al. . | |
| 5,083,266 | 1/1992 | Watanbe . | |
| 5,402,200 | 3/1995 | Shrinkle et al. . | |

FOREIGN PATENT DOCUMENTS

| | | |
|---|---|---|
| 559059 | 2/1986 | Australia . |
| 0 134 966 | 3/1985 | European Pat. Off. . |
| 0 164 890 | 12/1985 | European Pat. Off. . |
| 0 172 344 | 2/1986 | European Pat. Off. . |
| 61-223916 | 4/1986 | Japan . |

OTHER PUBLICATIONS

Computer Design, "Chip set tackles lap top design issues, offers flat-panel VGA control", Oct. 15, 1988, vol. 27, No. 19, p. 21.

(List continued on next page.)

*Primary Examiner*—Vincent N. Trans
*Attorney, Agent, or Firm*—Sixbey, Friedman, Leedom & Ferguson, PC

[57] **ABSTRACT**

A battery powered computer system monitors the address bus to determine when selected peripheral devices have not been accessed for a preset amount of time. When the preset amount of time has passed the system powers itself down and stops the system clock, placing it in a standby mode. The system is awakened by depressing a standby switch, unless there is insufficient energy in the batteries, under which circumstances an AC power source must be connected before the system can be awakened.

**91 Claims, 11 Drawing Sheets**

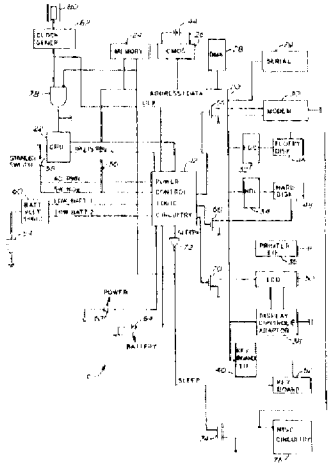

OTHER PUBLICATIONS

IBM Technical Disclosure Bulletin, "Method to provide low power standby mode for online devices", Apr. 1987, p. 4763.
Toshiba Corp., "Toshiba T1600 Personal Computer Reference Manual", Sep. 1988, entire manual.
Conner Peripherals, Inc., "CP3022 Product Information", Feb. 24, 1988.
Conner Peripherals, Inc., "CP-3040 Series", undated, one page.
Conner Peripherals, Inc., "CP-344 Technical Manual", Apr., 1988, pp. 1-55.
Conner Peripherals, Inc., "CP-344 Technical Manual", undated, pp. 1-55.
Conner Peripherals, Inc., "CP3021 Product Specification", Oct. 1987, pp. 1-47.
Zenith Data Systems, Inc., "TM-170 Technical Reference Manual", 1986, entire manual.
Zenith Data Systems, Inc., "Morrow Designs Pivot—Keyboard Processor Firmware", Aug. 8, 1985, entire listing.
Zenith Data Systems, Inc., "ZF-171 Portable Computer Service Data Blue Book", Feb. 1987, pp. 3-35, 6-4, 6-64 to 6-67.
Declaration of Kevin Swart, Nov. 25, 1995, entire declaration, including referenced exhibits.
Zenith Data Systems, Inc., "Service Guide Z-171 PC Series", 1985, entire manual.
Zenith Data Systems, Inc., "Service Manual—Laptop Computer—ZFL-181-92", 1987, entire manual with additional copies of selected schematics.
Zenith Data Systems, Inc., "Zenith Upgrades Z-183", Nov. 2, 1987, 3 pages.
Zenith Data Systems, Inc., "TurbosPort 386 Portable Computer Owner's Manual", 1988, pp. 1-12, 3-8.
Zenith Data Systems, Inc., "Service Manual TurbosPort 386 computer ZTC-3034", 1988, entire manual.
Electronics, "This Laptop has the Power of an 80386-based PC", Apr. 28, 1988, pp. 103-104.
PC Magazine, "Dazzling Blue Z-181: Most Usable Laptop", Nov. 1986, pp. 33-35.
PC Magazine, "Portable Computers", Jan. 27, 1987, p. 173.
PC Magazine, "Laptops", Jul. 1987, pp. 238, 242, 244.
PC Magazine, "286 and 386-based Portables", Oct. 11, 1988, pp. 150, 152, 155.
LNW Research Corp., "LNW80 Technical Reference Manual", 1982, entire manual including schematics.
Expert Report of Dale E. Buscaino, Compaq Computer Corp. v. Packard Bell Electronics, Inc., Apr. 15, 1996, entire report with portions redacted.
Zenith Data Systems Corp., Fact and Arguments, Opposition to EPO Patent No. 0364222, Dec. 1, 1995, entire paper.
Zenith Data Systems Corp., Z-180 PC Series Technical Reference Manual, 1987, pp. 14-2 to 14-3.
IBM Corp., PC Convertible Technical Reference, vol. 1, First Edition, Feb. 1986, pp. 2-11, 4-7 to 4-10, 4-37 to 4-41, D-3 to D-4.
Intel Circuit Design for Disabling CPU Clock, Jun. 12, 1987.
Poqet Computer Corp., "Poqet PC Users Guide", 1991, entire document.
Data General Corp., "Using the BATTSAVE Utility", Apr. 1988, entire manual.
Data General Corp., "Data General One Model 2T Owner's Manual", Aug. 1987, entire manual.
Chips and Technologies, Inc., "82C605/82C606 CHIPSpak/CHIPSport Multifunction Controllers", May 1987, entire manual.
Chips and Technologies, Inc., "82C605/82C606 CHIPSpak/CHIPSport Errata", Jan. 6, 1988, entire manual.
Chips and Technologies, Inc., "82C605/82C606 CHIPSpak/CHIPSport Errata", Jan. 12, 1988, entire manual.
Zenith Data Systems, Inc., "TurbosPort 386 Portable Computer Owner's Manual", 1988, entire manual.
Zenith Data Systems, Inc., "Parts List and Schematics—Z-170 Series computers", 1986, entire manual.
Zenith Data Systems, Inc., "ZF-171 Portable Computer Service Data Blue Book", Feb. 1987, entire manual.

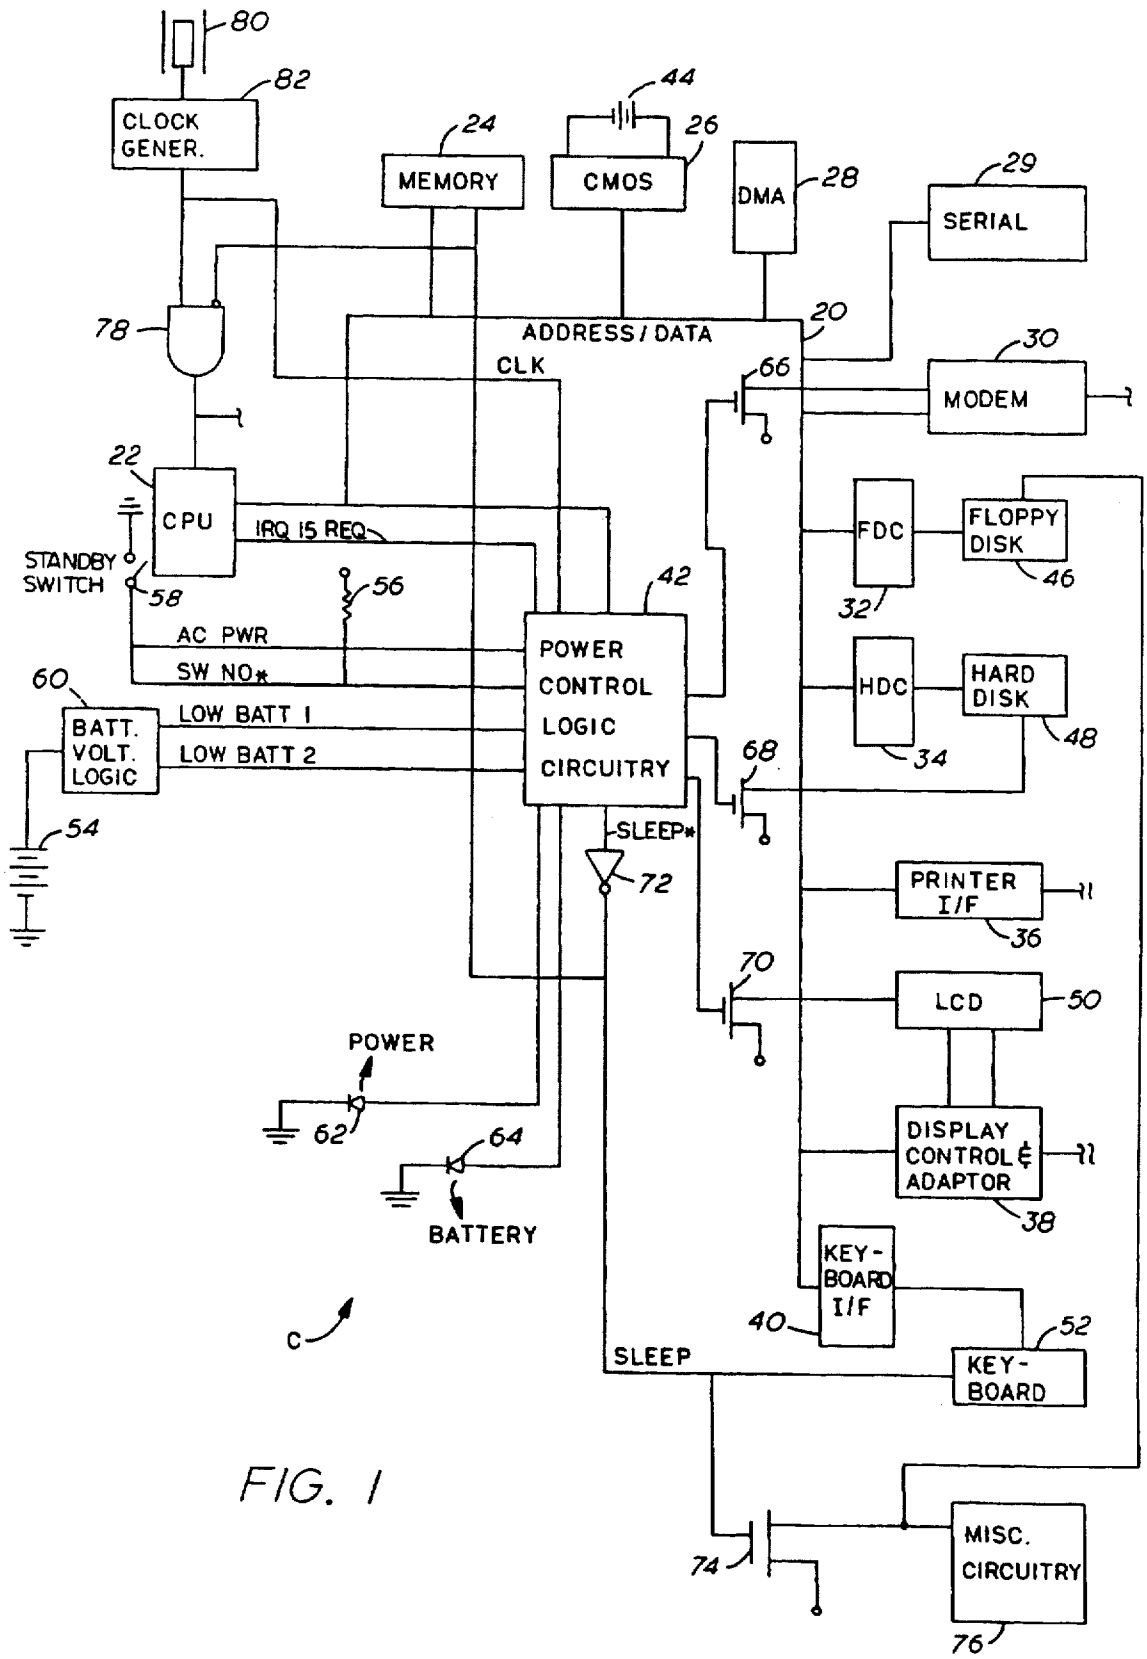
80
82
CLOCK GENER.
24
MEMORY
44
26
CMOS
DMA
28
29
SERIAL
78
ADDRESS / DATA
20
CLK
66
30
MODEM
22
CPU
IRQ 15 REQ
STANDBY SWITCH
58
56
42
FDC
FLOPPY DISK
46
32
AC PWR
SW NO*
POWER CONTROL LOGIC CIRCUITRY
60
BATT. VOLT. LOGIC
LOW BATT 1
LOW BATT 2
HDC
HARD DISK
48
34
68
54
SLEEP*
72
PRINTER I/F
36
70
LCD
50
POWER
62
64
DISPLAY CONTROL & ADAPTOR
38
BATTERY
KEY-BOARD I/F
40
52
C
SLEEP
KEY-BOARD
74
MISC. CIRCUITRY
76

FIG. 1

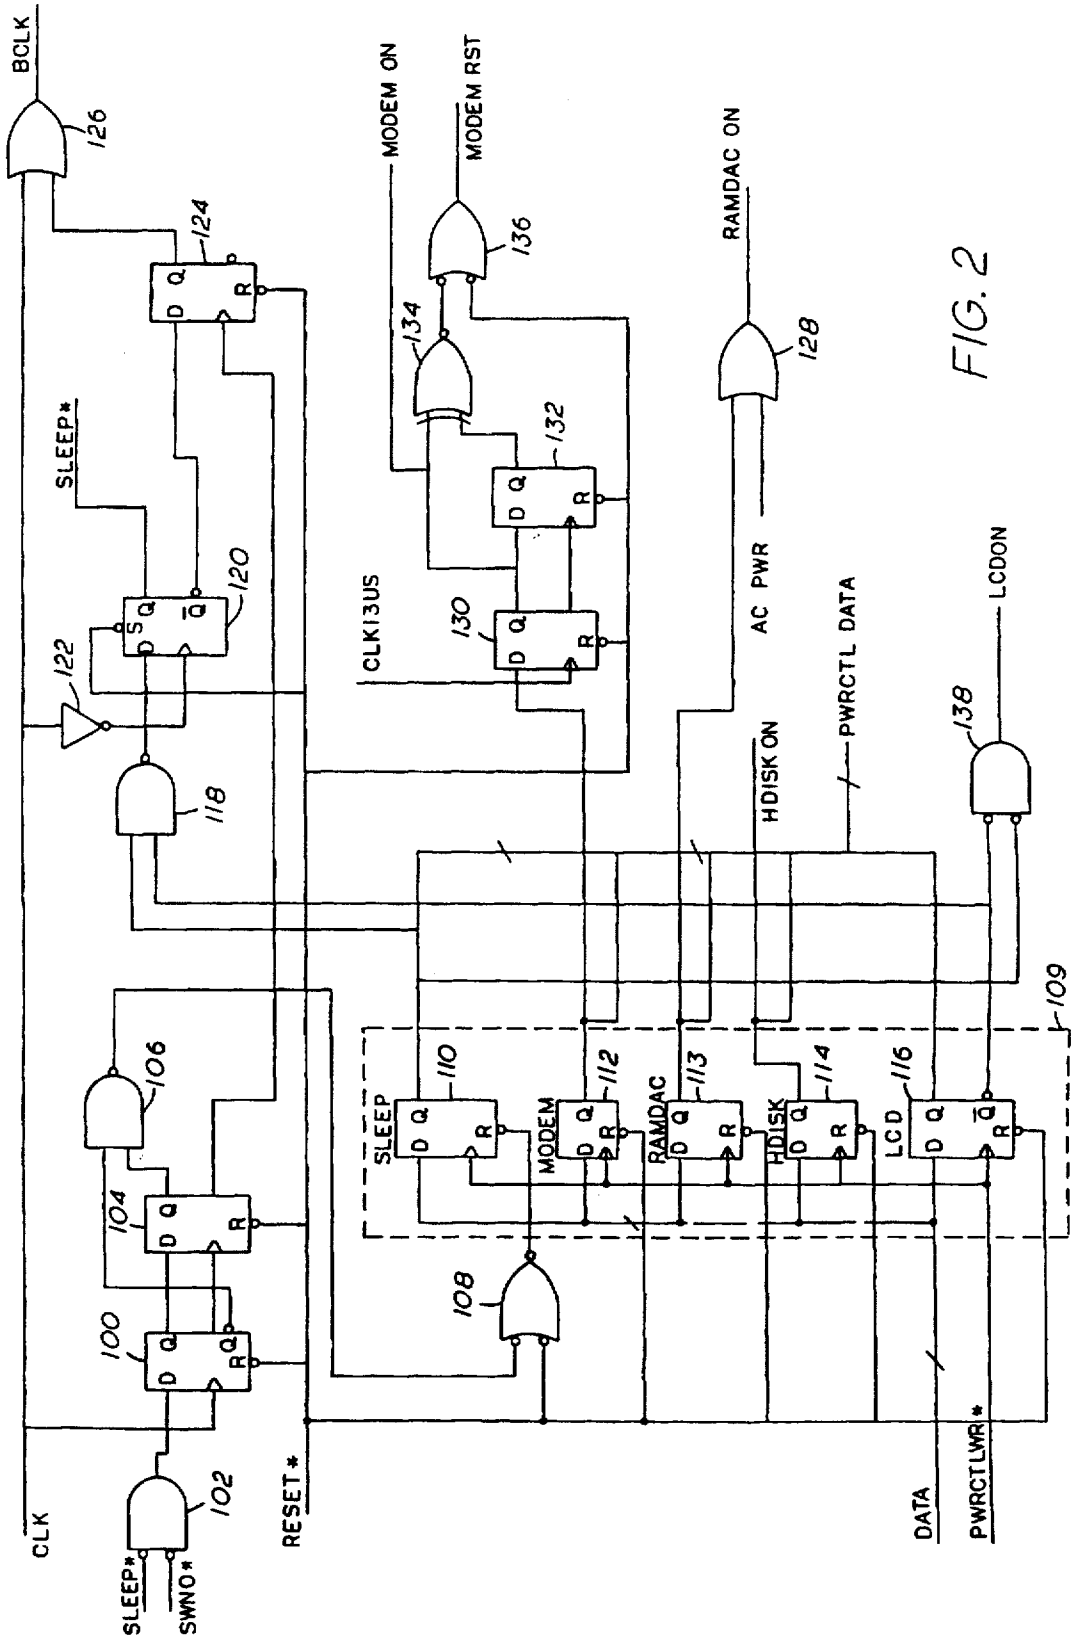
BCLK
126
124
SLEEP*
120
122
118
106
104
100
102
CLK
SLEEP*
SWNO*
RESET*
MODEM ON
MODEM RST
136
134
132
130
CLK13US
RAMDAC ON
128
AC PWR
PWRCTL DATA
LCDON
138
HDISK ON
109
110
112
113
114
116
SLEEP
MODEM
RAMDAC
HDISK
LCD
108
DATA
PWRCTLWR*

FIG. 2

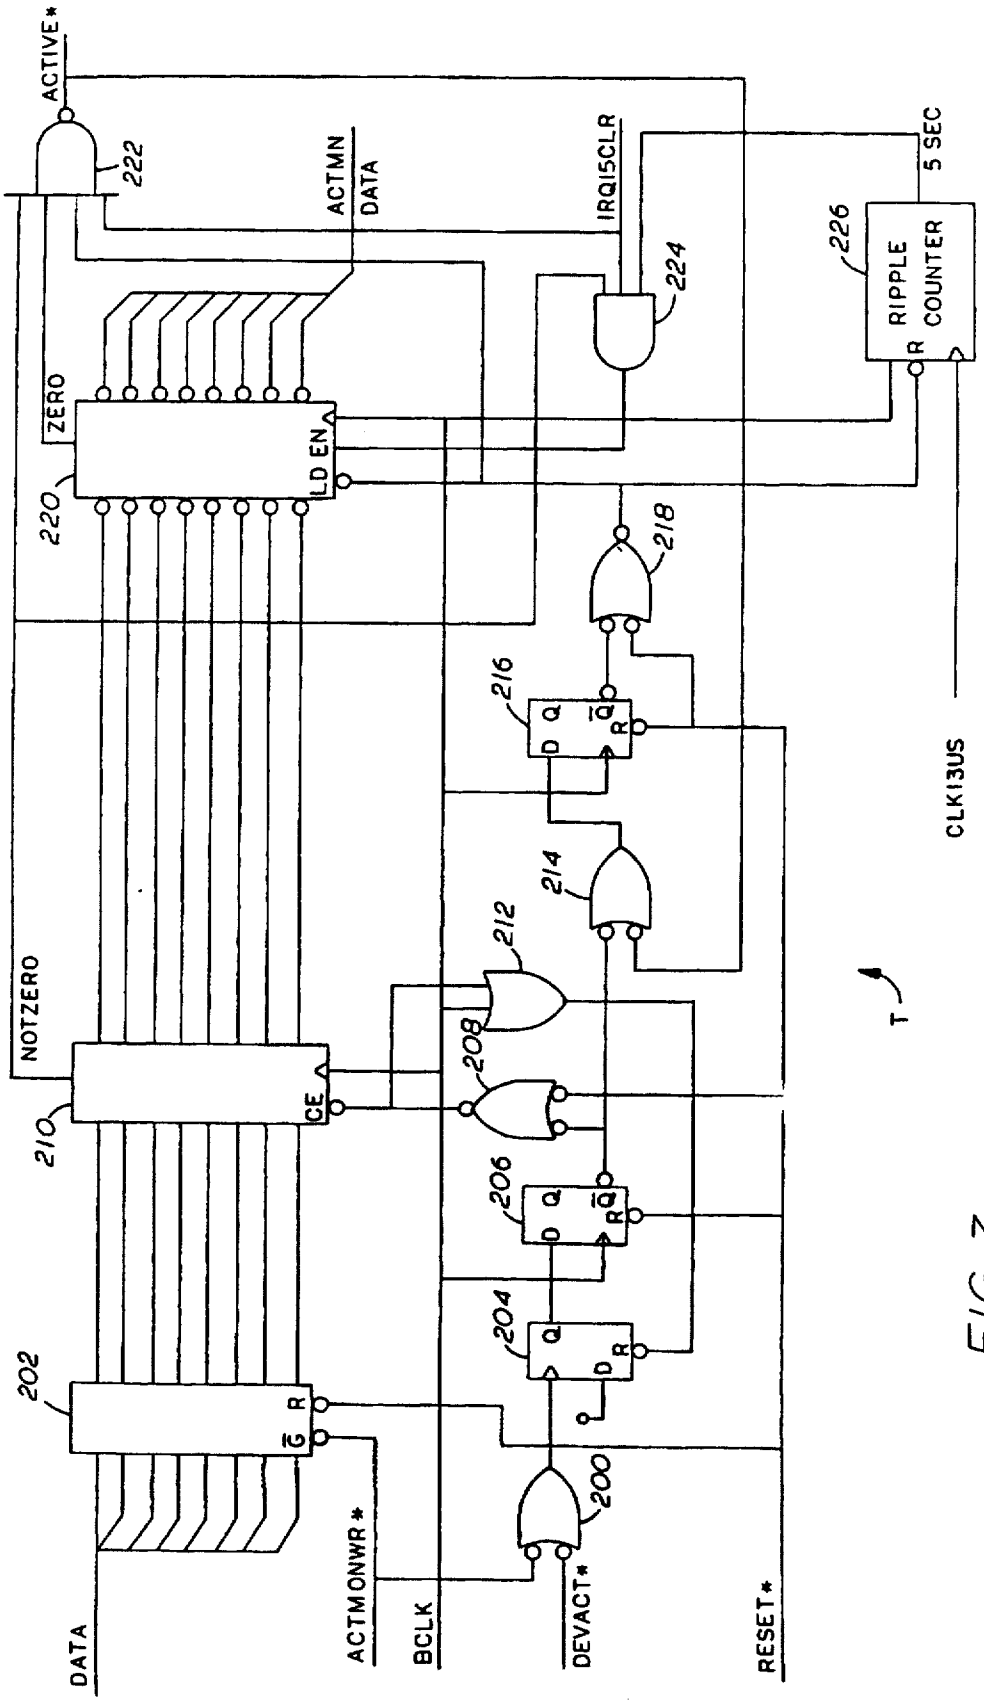
ACTIVE*
222
ACTMN DATA
IRQ15CLR
5 SEC
224
226
RIPPLE COUNTER
R
ZERO
LD EN
220
218
216
D Q
R
214
212
NOTZERO
CE
210
208
206
204
202
R
G
200
DATA
ACTMONWR*
BCLK
DEVACT*
RESET*
CLK13US
T

FIG. 3

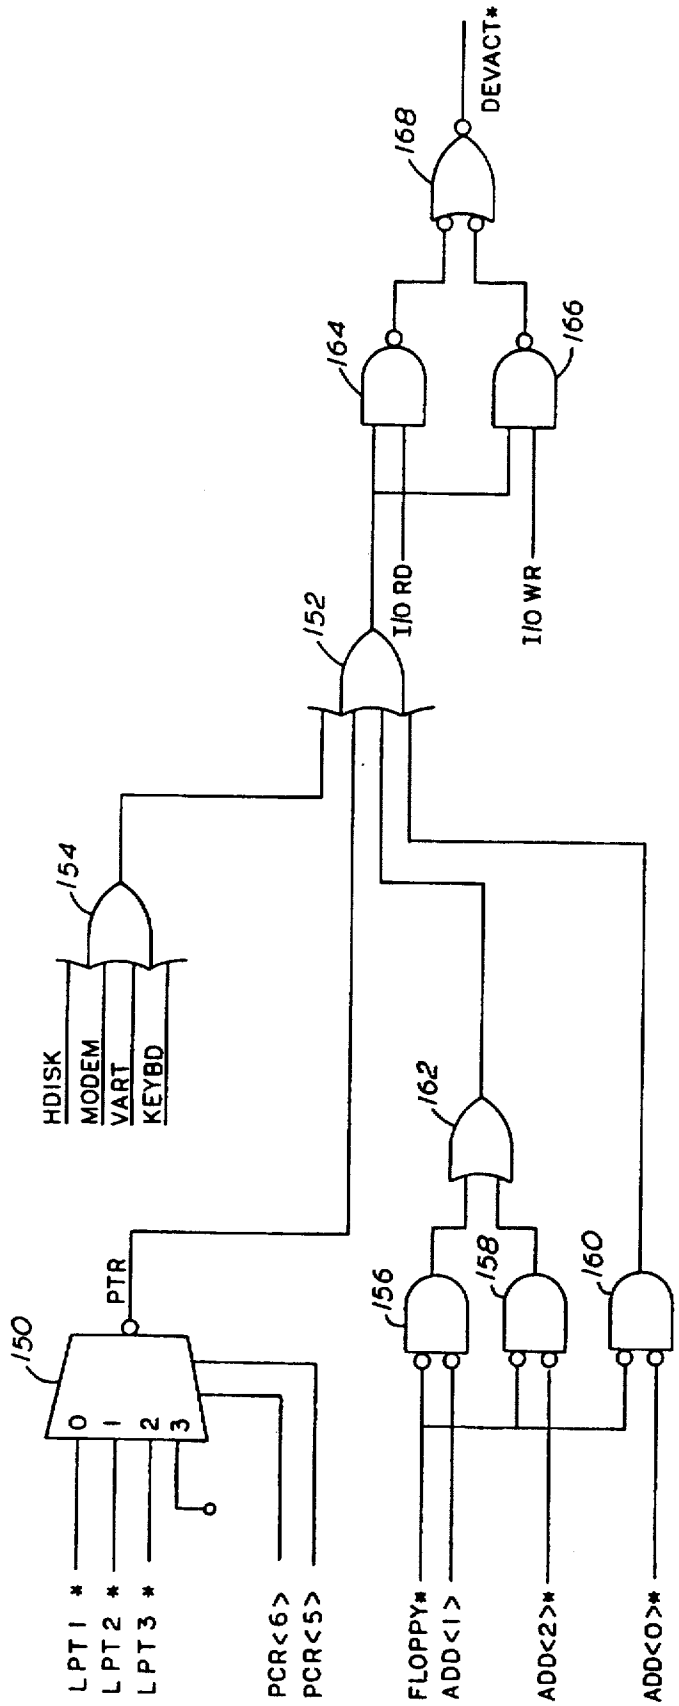
DEVACT*
168
164
166
I/O RD
I/O WR
152
154
HDISK
MODEM
VART
KEYBD
162
PTR
150
156
158
160
0
1
2
3
LPT1 *
LPT2 *
LPT3 *
PCR<6>
PCR<5>
FLOPPY*
ADD<1>
ADD<2>*
ADD<0>*

FIG. 4

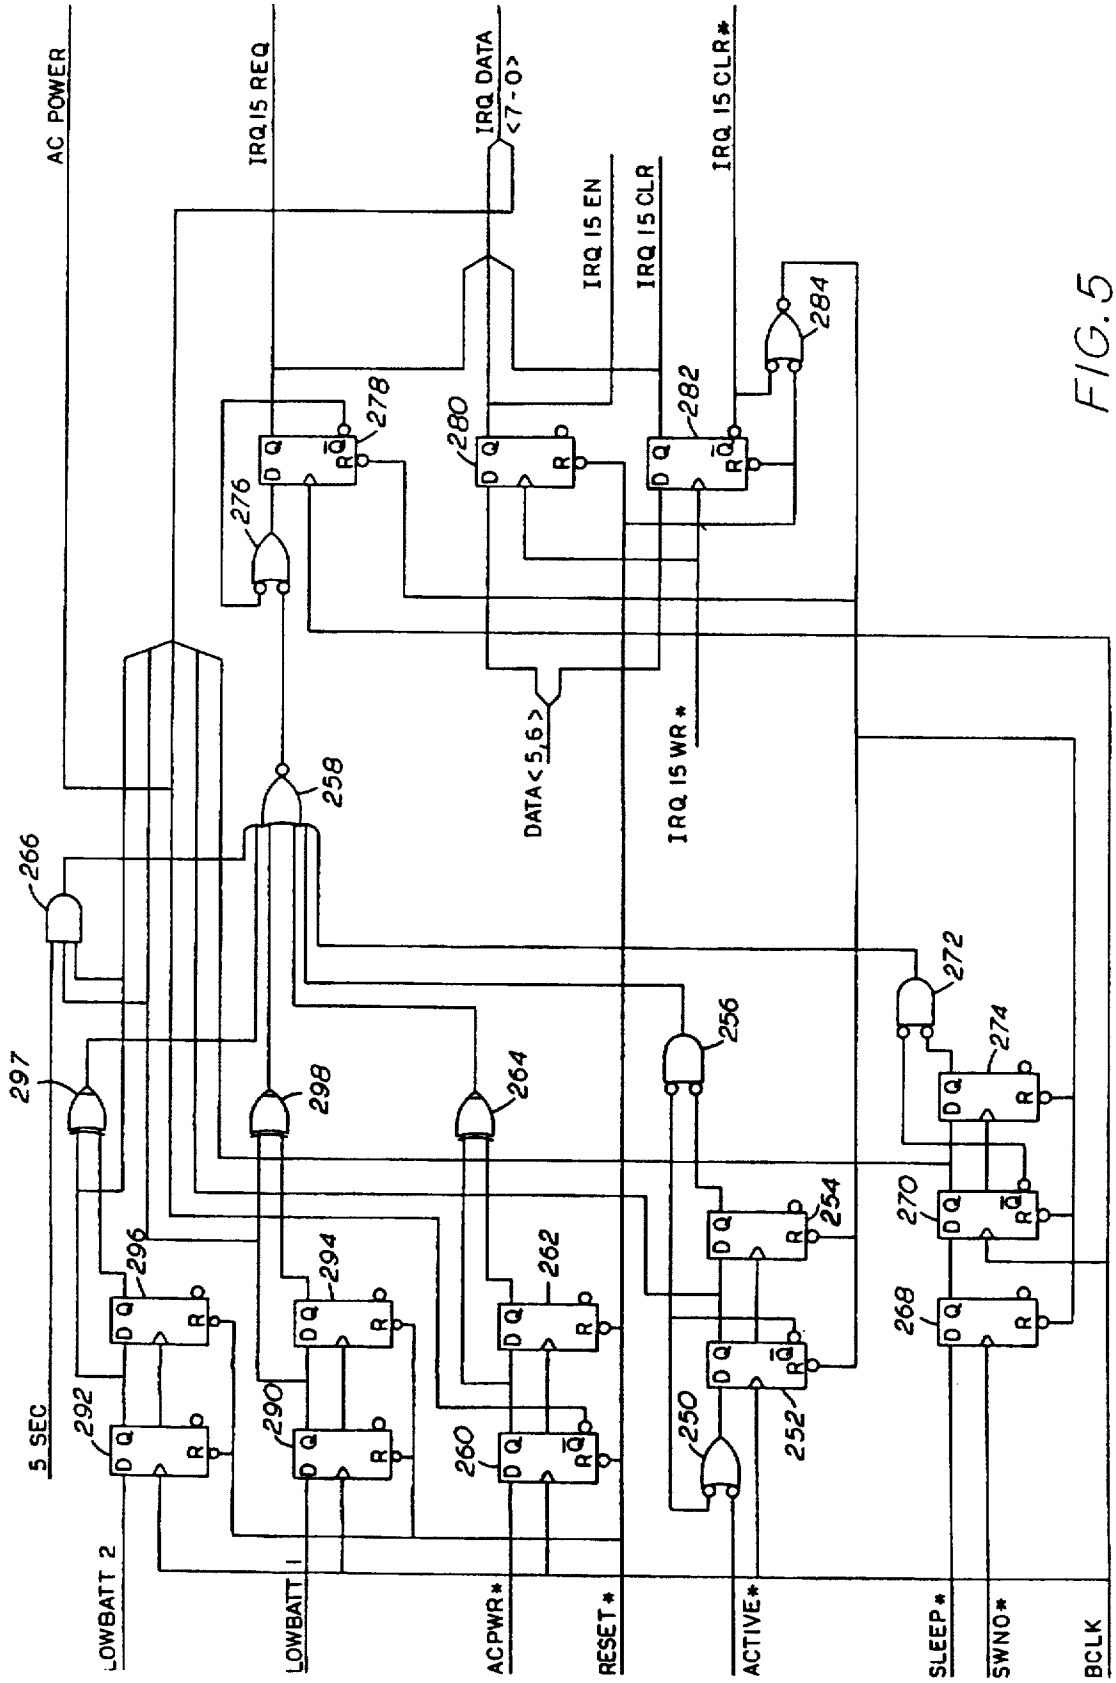
AC POWER
IRQ15 REQ
IRQ DATA <7-0>
IRQ 15 EN
IRQ 15 CLR
IRQ 15 CLR*
DATA<5,6>
IRQ 15 WR*
5 SEC
LOWBATT 2
LOWBATT 1
ACPWR*
RESET*
ACTIVE*
SLEEP*
SWNO*
BCLK
258
266
297
298
264
256
272
274
254
270
262
294
296
268
292
290
260
250
252
276
278
280
282
284

FIG. 5

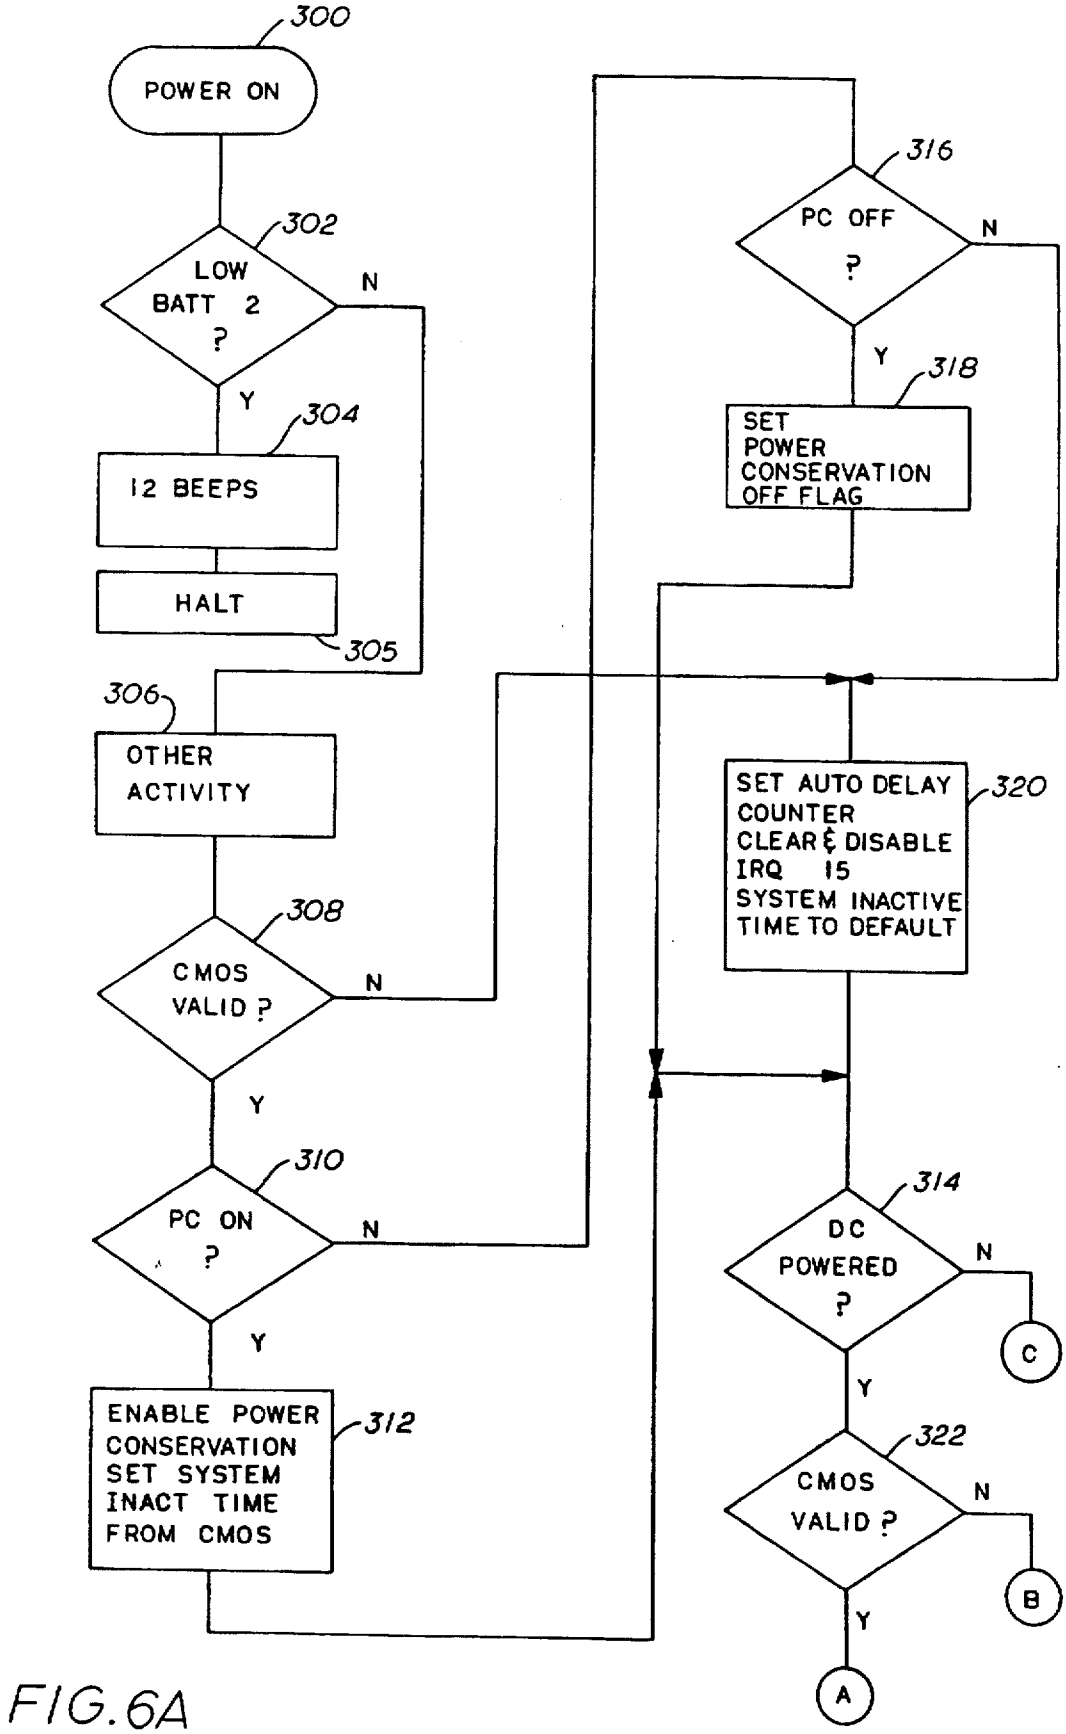
300
POWER ON
302
LOW BATT 2 ?
N
Y
304
12 BEEPS
HALT
305
306
OTHER ACTIVITY
308
CMOS VALID ?
N
Y
310
PC ON ?
N
Y
ENABLE POWER CONSERVATION SET SYSTEM INACT TIME FROM CMOS
312
316
PC OFF ?
N
Y
318
SET POWER CONSERVATION OFF FLAG
SET AUTO DELAY COUNTER CLEAR & DISABLE IRQ 15 SYSTEM INACTIVE TIME TO DEFAULT
320
314
DC POWERED ?
N
C
Y
322
CMOS VALID ?
N
B
Y
A

FIG. 6A

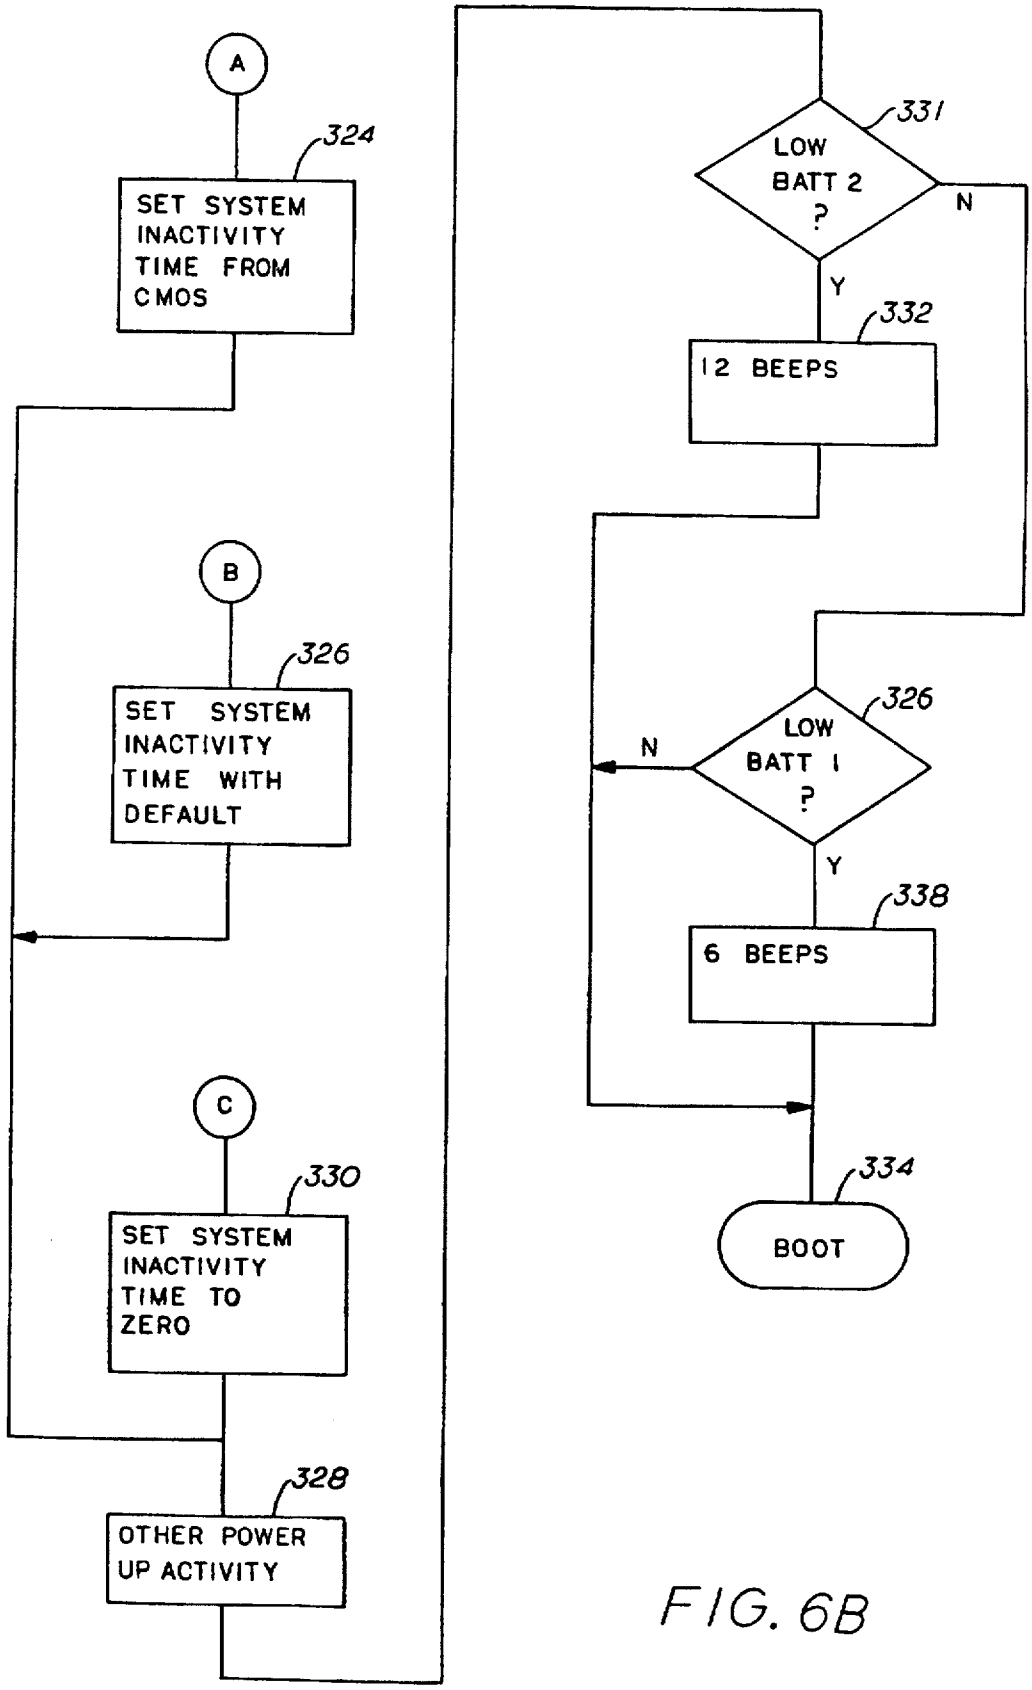
A
324
SET SYSTEM INACTIVITY TIME FROM CMOS
B
326
SET SYSTEM INACTIVITY TIME WITH DEFAULT
C
330
SET SYSTEM INACTIVITY TIME TO ZERO
328
OTHER POWER UP ACTIVITY
331
LOW BATT 2 ?
N
Y
332
12 BEEPS
326
LOW BATT 1 ?
N
Y
338
6 BEEPS
334
BOOT

FIG. 6B

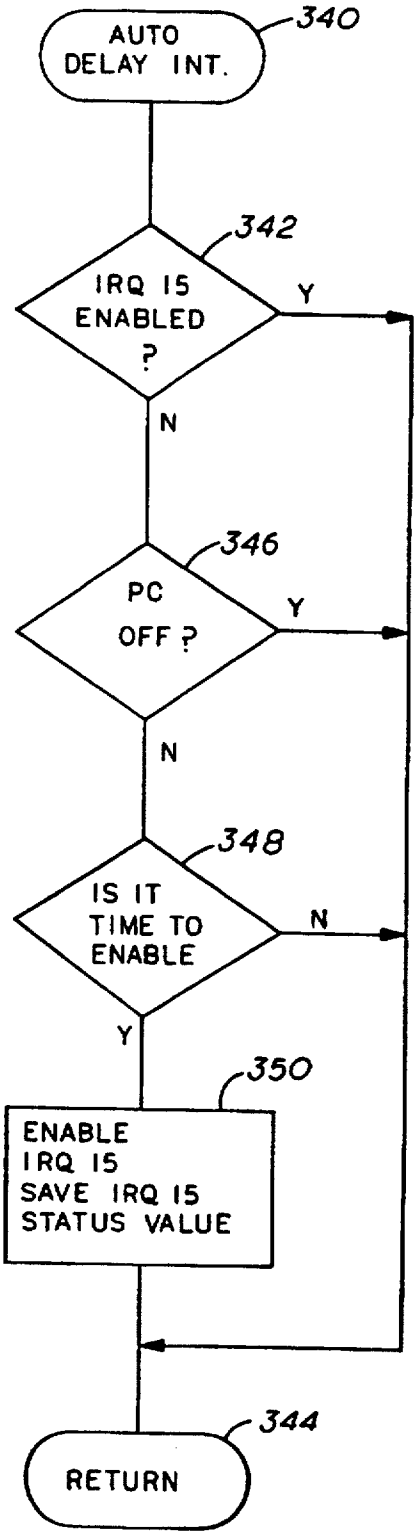
AUTO DELAY INT.
340
342
IRQ 15 ENABLED ?
Y
N
346
PC OFF ?
Y
N
348
IS IT TIME TO ENABLE
N
Y
350
ENABLE IRQ 15
SAVE IRQ 15 STATUS VALUE
344
RETURN

FIG. 6C

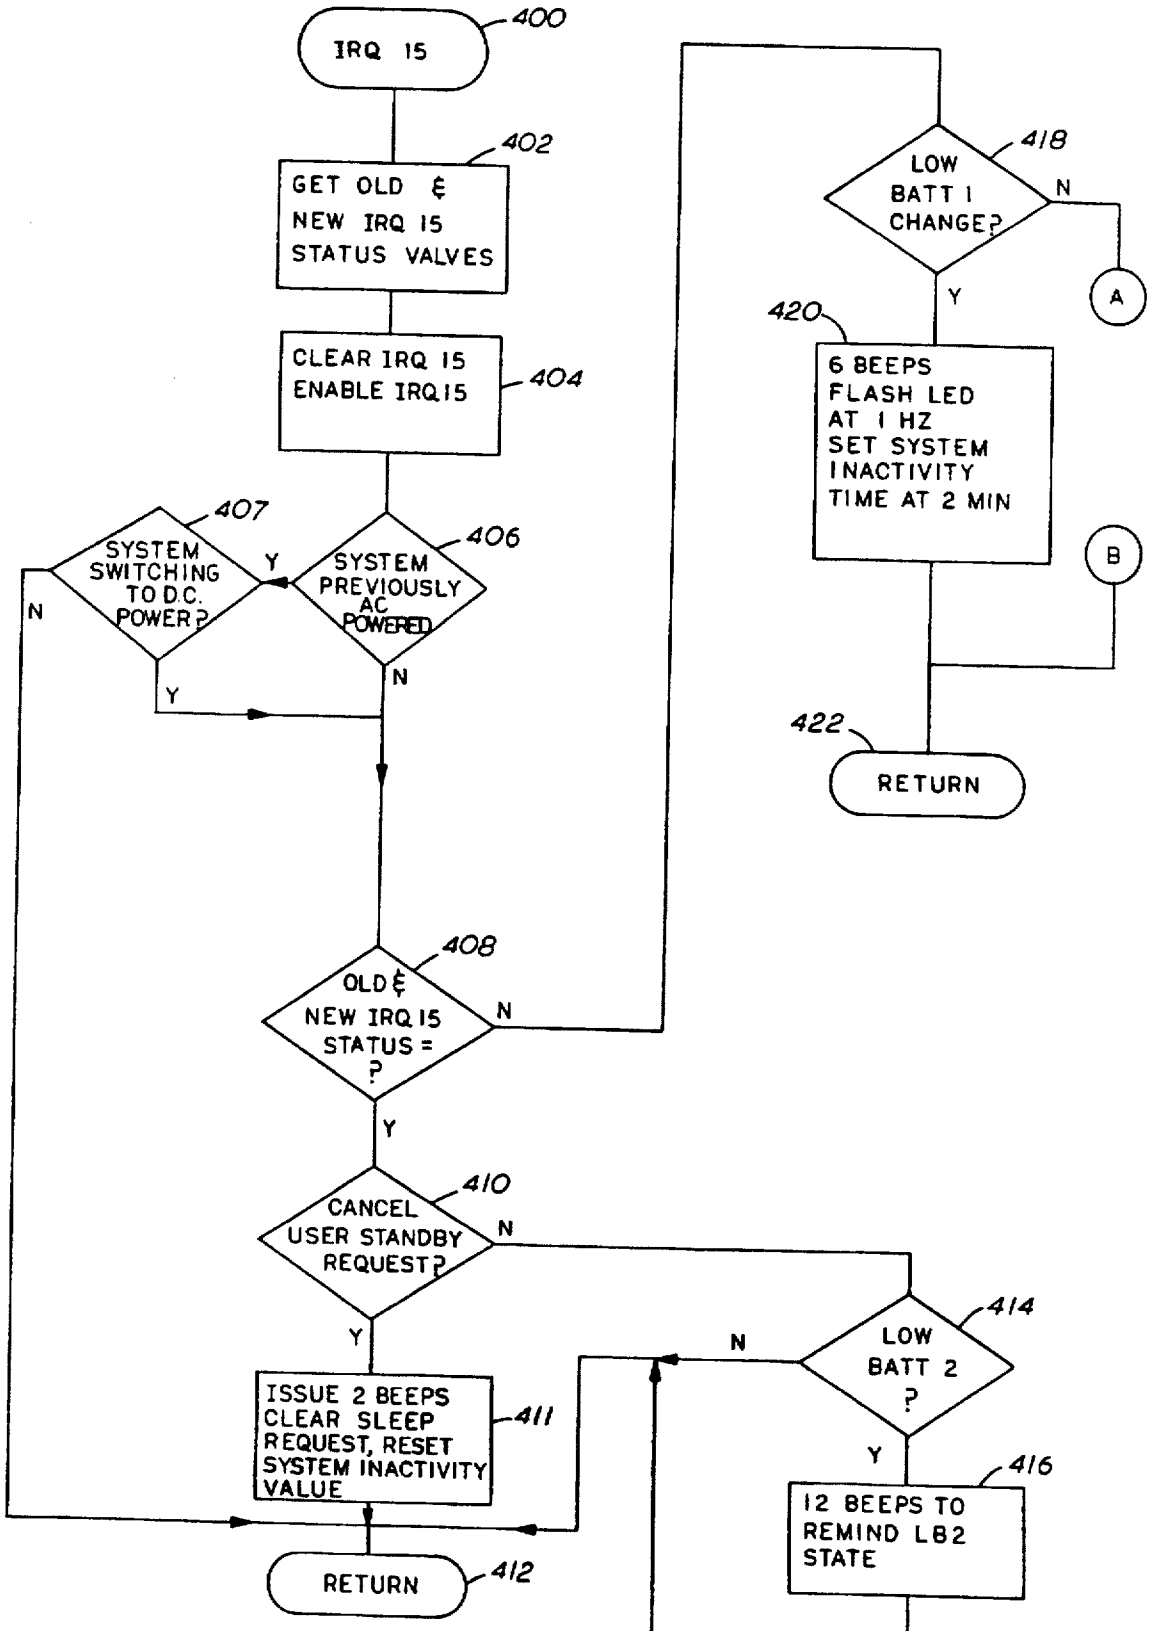
400
IRQ 15
402
GET OLD & NEW IRQ 15 STATUS VALVES
CLEAR IRQ 15 ENABLE IRQ15
404
407
SYSTEM SWITCHING TO D.C. POWER?
406
SYSTEM PREVIOUSLY AC POWERED
Y
N
408
OLD & NEW IRQ 15 STATUS = ?
410
CANCEL USER STANDBY REQUEST?
ISSUE 2 BEEPS CLEAR SLEEP REQUEST, RESET SYSTEM INACTIVITY VALUE
411
RETURN
412
414
LOW BATT 2 ?
416
12 BEEPS TO REMIND LB2 STATE
418
LOW BATT 1 CHANGE?
A
420
6 BEEPS FLASH LED AT 1 HZ SET SYSTEM INACTIVITY TIME AT 2 MIN
B
422
RETURN

FIG. 7A

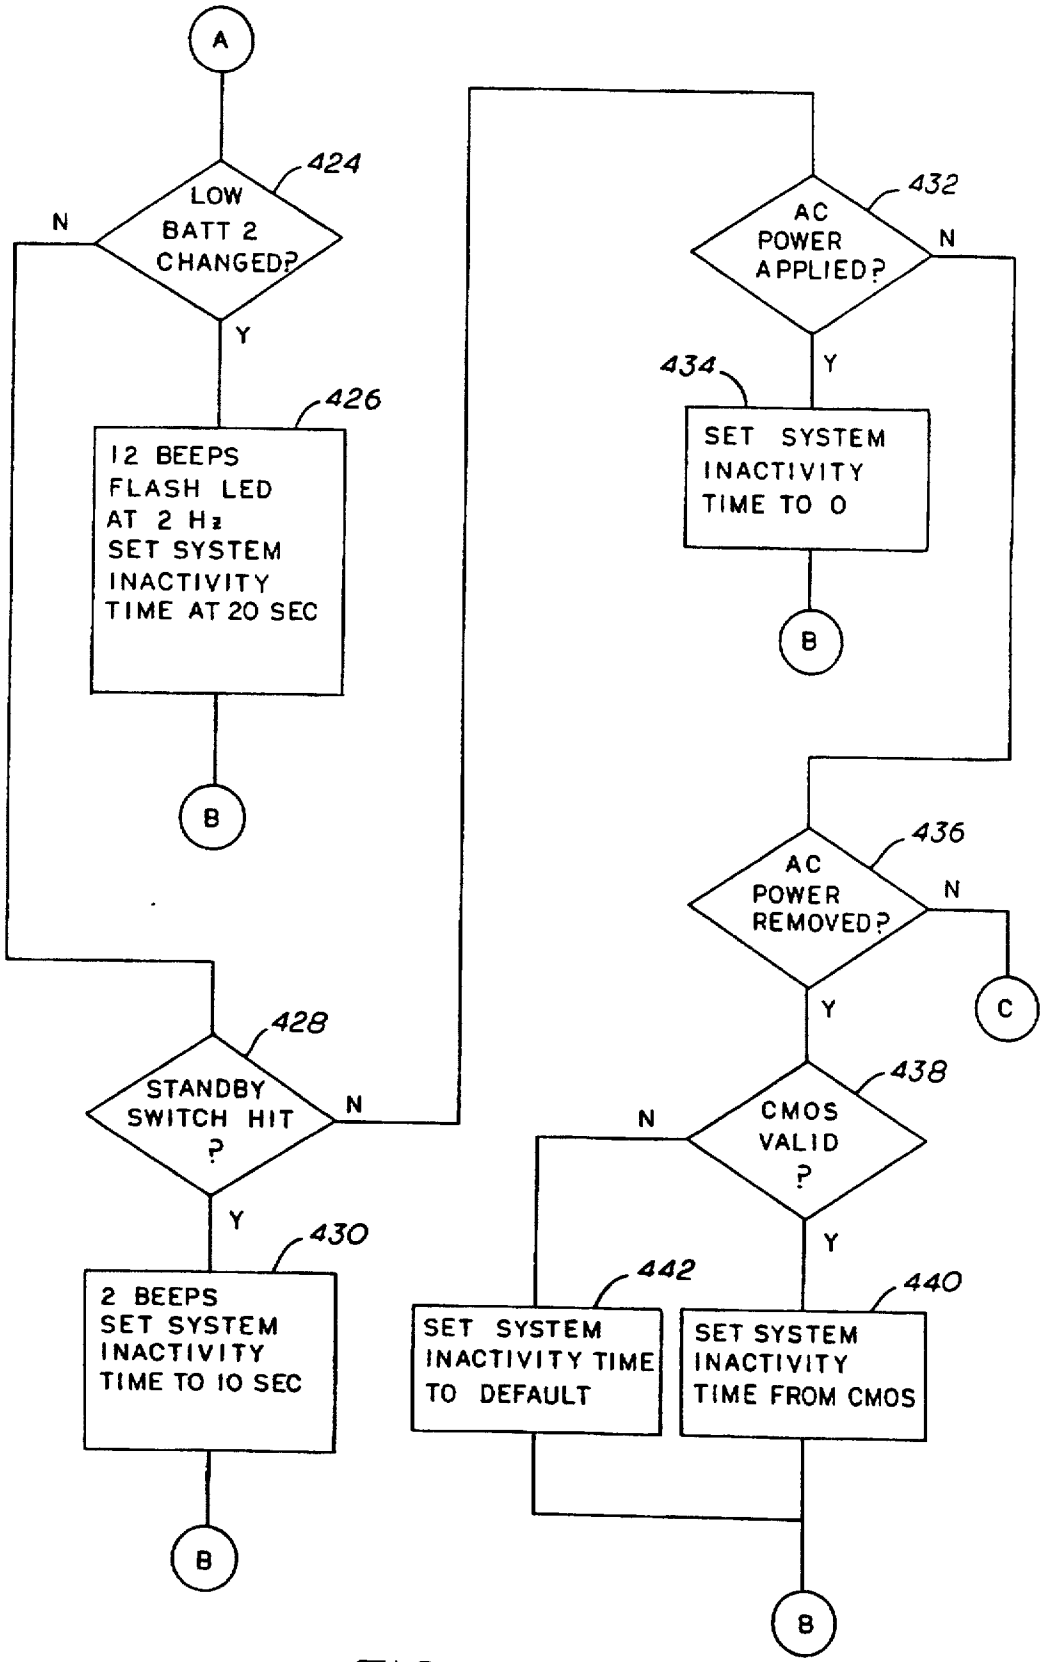
A
424
LOW BATT 2 CHANGED?
N
Y
426
12 BEEPS
FLASH LED AT 2 Hz
SET SYSTEM INACTIVITY TIME AT 20 SEC
B
428
STANDBY SWITCH HIT ?
N
Y
430
2 BEEPS
SET SYSTEM INACTIVITY TIME TO 10 SEC
B
432
AC POWER APPLIED?
N
Y
434
SET SYSTEM INACTIVITY TIME TO 0
B
436
AC POWER REMOVED?
N
Y
C
438
CMOS VALID ?
N
Y
442
SET SYSTEM INACTIVITY TIME TO DEFAULT
440
SET SYSTEM INACTIVITY TIME FROM CMOS
B

FIG. 7B

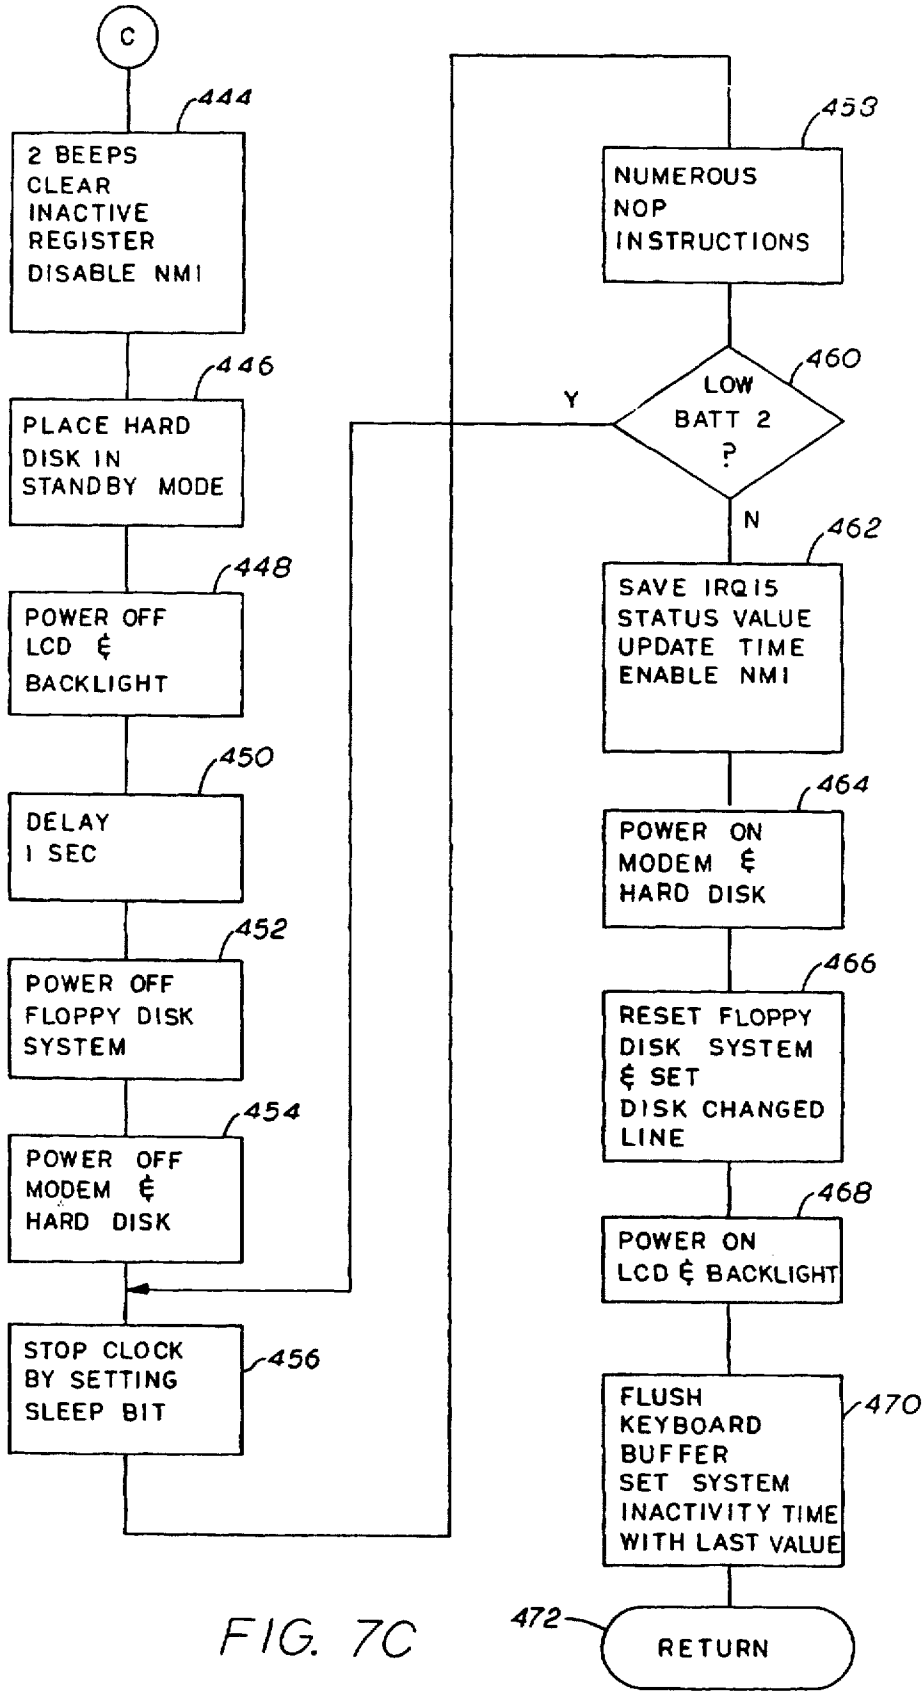
C
444
2 BEEPS
CLEAR
INACTIVE
REGISTER
DISABLE NMI
446
PLACE HARD
DISK IN
STANDBY MODE
448
POWER OFF
LCD &
BACKLIGHT
450
DELAY
1 SEC
452
POWER OFF
FLOPPY DISK
SYSTEM
454
POWER OFF
MODEM &
HARD DISK
STOP CLOCK
BY SETTING
SLEEP BIT
456
453
NUMEROUS
NOP
INSTRUCTIONS
460
LOW
BATT 2
?
Y
N
462
SAVE IRQ15
STATUS VALUE
UPDATE TIME
ENABLE NMI
464
POWER ON
MODEM &
HARD DISK
466
RESET FLOPPY
DISK SYSTEM
& SET
DISK CHANGED
LINE
468
POWER ON
LCD & BACKLIGHT
470
FLUSH
KEYBOARD
BUFFER
SET SYSTEM
INACTIVITY TIME
WITH LAST VALUE
472
RETURN

FIG. 7C

# APPARATUS FOR REDUCING COMPUTER SYSTEM POWER CONSUMPTION

**Matter enclosed in heavy brackets [ ] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue.**

## BACKGROUND OF THE INVENTION:

1. Field of the Invention

The invention relates to battery powered computer systems, and more particularly, to circuits and methods for reducing the power consumption of the computer system.

2. Description of the Prior Art

Portable computer systems are rapidly developing the capabilities of conventional desktop or floor mounted personal computer systems. Hard disk units are being integrated into portable computers because of the large amounts of information being processed and the large size of many applications programs. At east one floppy disk unit is integrated in the vast majority of portable computers, even if a hard disk unit is installed, to allow loading of information and use of applications requiring key disks and of diagnostic programs. Modems have been integrated into portable computers for some time to allow communications and information transfer between the user and a remote location, for example, the home office. The displays in the portable computer systems are becoming much more elaborate and readable. The pixel count on the standard liquid crystal displays (LCD's) utilized is increasing, as is the viewing angle. The use of backlighting allows use of LCD's in low light environments and improves the contrast ratio of the display. More complex circuitry is being installed in the portable computers to support these improved peripheral devices and to support the increased speeds and capabilities of the microprocessors utilized in the portable computer systems.

The various peripheral devices and high speed circuitry mentioned above consume large amounts of power when operating. This has made it very difficult to provide all the possible functionality available and yet have an acceptable battery life when the portable computer system is battery powered, so that it can be used in locations where alternating current is not available. Using CMOS components helped reduce the power consumption of the circuitry, but even the use of CMOS components is insufficient at the clock speeds and performance levels of available circuitry. Therefore, a dilemma arises whether to provide lesser functionality with longer battery life or greater functionality with lesser battery life or even no battery operation.

Various alternatives were tried to resolve the problem. For example, the IBM Corporation PC Convertible included a switch which the user could press to place the computer system in a standby mode, but the PC convertible with relatively simple, with a low level of functionality as compared to what is currently available and the requirement of a user action limited its use to circumstances where the user remembered to depress the switch. Blanking the display after a period of keyboard inactivity saved power as well as prolonged the life of the display and was widely utilized. A hard disk unit was developed which reduced the power used by the controlling electronics by utilizing only certain portions of the track for servo information and turning off the read channel circuitry until just before a servo burst was expected. Additionally, a programmable value could be provided to the hard disk unit so that after a given inactivity



interval defined by this value, the hard disk unit was allowed to spin down and all but some interface circuitry was shut down. While these alternatives did provide some relief, they were not complete solutions to satisfactorily resolve the dilemma and design tradeoffs still were forced to occur.

## SUMMARY OF THE INVENTION

A battery powered portable computer system according to the present invention determines when the computer system is not in use by monitoring peripheral device activity and shutting down the system after a given inactivity period, thus entering a standby mode. The entry is not dependent on an action by the user, but occurs automatically.

The system monitors accesses to the hard disk unit, the floppy disk unit, the keyboard, the serial ports and the printer to determine if the system is active. If so, a timer is restarted to each access. If the timer counts down to zero, then the system is considered inactive and power is removed from the hard disk unit, the floppy disk unit, the LCD, and miscellaneous circuitry, and the system clock provided to the microprocessor and other portions of the circuitry is stopped. Stopping the clock dramatically reduces the power consumed by the circuitry because CMOS devices, which are utilized in the preferred embodiment, consume very little power at zero frequency operation.

To bring the computer system out of this standby mode, the user depresses a switch which starts the wake up operation. However, if the charge remaining in the batteries is below a given level referred to as low battery 2, the system will not wake up or leave standby operation. This prevents the data in the machine from being lost when the powering up process consumes the remaining energy in the batteries.

The inactivity interval timer is set at a first value when the computer system is turned on, with the interval value changeable by the user thereafter. The interval value is reduced automatically when the battery charge reaches a level referred to as low battery 1 and is reduced to a very small value when the battery charge reaches low battery 2. The interval is also set to a very short interval when the user presses the standby switch while they system is operating. The inactivity interval is not utilized when the computer system is powered from an alternating current (AC) source, such as an AC adaptor/battery charger or mating expansion unit.

This invention allows the battery powered operating period of the computer system to be greatly extended, thus allowing the use of advanced capabilities and functions while having a satisfactory battery operated operating interval.

## BRIEF DESCRIPTION OF THE FIGURES

A better understanding of the invention can be obtained when the following detailed description of the preferred embodiment is considered in conjunction with the following drawings, in which:

FIG. **1** is a schematic block diagram of a computer system incorporating the present invention;

FIGS. **2**, **3**, **4** and **5** are more detailed schematic logic diagrams of portions of the computer system of FIG. **1**;

FIGS. **6A**, **6B** and **6C** are flowchart illustrations of sequences for preparing the computer system of FIG. **1** for utilizing the present invention; and

FIGS. **7A**, **7B** and **7C** are flowchart illustrations of a sequence for controlling portions of the computer system of FIG. **1** according to the present invention.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to FIG. **1**, the letter C generally represents a computer system incorporating the present invention. An address and data bus **20** is the primary communication pathway in the computer system C. Attached to this address and data bus **20** are numerous units, including a central processing unit or microprocessor **22**, memory devices **24**, a CMOS memory and clock **26**, a direct memory access (DMA) controller **28**, a serial interface **29**, a modem **30**, a floppy disk controller **32**, a hard disk controller **34**, a parallel printer interface **36**, a display controller and adaptor **38**, a keyboard interface **40**, and power control logic circuitry **42**.

The microprocessor or CPU **22** is preferably a CMOS version of the Intel Corporation 80286 microprocessor. The CMOS version of the processor is preferable because of its lower power consumption while operating and because it is a fully static device which is capable of operating with a zero frequency clock and yet not losing any data. The memory devices **24** are composed of read-only memories (ROM's) and random access memories (RAM's). The RAM's in the preferred embodiment are preferably pseudostatic devices which contain their own individual refresh circuitry so that other portions of the computer C need not be activated to provide refresh signals to the memories during low power consumption modes. The CMOS memory **26** is preferably powered by its own separate battery **44** so that certain critical or useful system configuration information can be retained at all times and not be stored on disk units or prompted for each time the computer system C is turned on. The serial interface **29** is preferably an asynchronous interface and includes the customary universal asynchronous receiver transmitter (UART) devices and appropriate buffering and level shifting circuitry. The modem **30** also contains the appropriate UART to perform the parallel/serial conversions necessary and contains the necessary tone developing and receiving circuitry and telephone line interface circuitry to allow the modem **30** to communicate over conventional telephone lines.

The floppy disk controller **32** interfaces to a floppy disk **46** drive. The hard disk controller **34** is coupled to a hard disk unit **48**. The hard disk unit **48** in the preferred embodiment is of a design as indicated in the prior art section as being appropriate for low power consumption applications. The display controller and adaptor **38** is coupled to a liquid crystal display (LCD) **50**. The LCD **50** in the preferred embodiment includes a backlight. The display controller and adaptor **38** includes the capability to bank the LCD **50** after a period of time has elapsed without a keystroke entry, to preserve the life of the LCD **50** and to reduce power consumption. In the preferred embodiment the display controller and adaptor **38** is designed to be compatible with a standard referred to as the VGA standard. The display controller and adaptor **38** is designed to be optionally connected to an external high quality color monitor and therefore includes the necessary circuitry, such as a RAM-DAC or color palette device, to allow the utilization of the monitor. The keyboard interface **40** connects the CPU **22** to a keyboard **52**, which includes a dedicated microprocessor for key scanning functions and communication with the keyboard interface **40** and has a line to receive a power down signal from the power control logic circuitry **42**.

A power control logic circuitry **42** performs the functions of monitoring the address and data bus **20** and determining the intervals since the last access to the serial port **29**, the modem **30**, the hard disk controller **34**, the printer interface **36** or the keyboard interface **40** or appropriate accesses to the floppy disk controller **32**. The power control logic circuitry **42** monitors the state of a line called ACPWR, which line indicates whether the power which is being consumed by the computer system C is being supplied by an alternating current source or whether the computer system C is operating off of its internal batteries **54**. The power control logic circuitry **42** monitors a line referred to as the SWN**0*** line, which is pulled up to a high level by a resistor **56** and which is connected to ground by a standby switch **58**. The presence of an asterisk after a signal or line indicates that the signal or line is an active or true low signal or line, rather than the conventional active or true high state. The standby switch **58** is a normally open switch which is momentarily closed by the user and is used to place the computer system C in standby mode or wake the computer system C up from standby mode. Additionally, the power control logic circuitry **42** monitors the status of two signals referred to as LOWBAT**1** and LOWBAT**2**, which are developed by the battery voltage logic **60** which monitors the charge remaining in the batteries **54**. If the charge is below a first given level indicating that approximately only 10% of a full charge remains, this is the LOWBAT**1** level and the LOWBAT**1** signal is set to reflect this state. If the batteries continue to be discharged, they eventually reach a second lower energy level, which is referred to as the LOWBAT**2** level and the LOWBAT**2** signal is set accordingly. The LOWBAT**2** level is reached when approximately only 5% of a full charge remains in the batteries **54**. These level signals are provided to indicate to the user warning levels relating to the amount of time available before depletion of the battery and to indicate to the computer system C the advisability of operating at full power levels.

The power control logic circuitry **42** has a number of outputs. Two outputs are used to drive the power light emitting diode (LED) **62** and the battery state LED **64**. The power control logic circuitry **42** drives the power LED **62** in a continuous fashion if the computer system C is turned on and not in standby mode. If the computer system C is in standby mode, indicating that it is in its low power consumption mode and is halted, the power LED **62** is flashed to provide an indication to the user. The battery LED **64** is off when the battery is sufficiently charged, begins flashing at a first relatively slow rate of 1 Hz when the LOWBAT**1** condition exists and flashes at a higher rate, for example a 2 Hz rate, when the LOWBAT**2** condition exists. These various battery level warnings are visual indicators to the user as to the remaining energy in the batteries. The power control logic circuitry **42** has a series of outputs which are connected to several field effect transistors (FET's) **66**, **68** and **70**, which are used, respectively, to control power to the modem **30**, the hard disk **48**, and the LCD **50**.

The power control logic circuitry has an output referred to as the SLEEP* signal which is provided to an inverter **72** to produce the SLEEP signal. The presence of an active or true SLEEP signal indicates that the computer system C is in sleep or standby mode. The SLEEP signal is connected to the keyboard **52** to cause the keyboard electronics and microprocessor to go into a low power condition. Additionally, the SLEEP signal is provided to an FET **74** to remove power from various miscellaneous circuitry **76** in the computer system C. It is to be noted that power is not removed from many portions of the computer system C, such as the CPU **22** and the memories **24**. The SLEEP signal is provided to the memory devices **24** to cause the RAM's to enter their pseudostatic mode and begin controlling their own refresh.

The SLEEP signal also is inverted and provided to the input of a two input clock AND gate **78** used to disable the system clock. A crystal **80** is connected to a clock generator circuit **82** which produces a CLK signal which is provided to the power control logic circuitry **42** for its internal clocking functions and which is provided to the second input of the clock AND gate **78**. The output of the clock AND gate **78** is the system clock which is used by the CPU **22** and other portions of the computer system C for clocking functions. Thus when the SLEEP signal is at a high state, the output of the AND gate **78** is at a low state, thereby stopping the system clock and causing the clocked CMOS circuitry located in the computer system C to go into a very low power state. Alternatively, if it is desired that the system clock be stopped at a high level, the clock AND gate **78** can be replaced by an OR gate and the SLEEP signal directly applied. For details regarding stopping the clock signal to the CPU **22**, refer to Harris Corporation ADC 286 Hardware Reference Manual, p. A-6, the contents of which are incorporated by reference herein.

The CLK signal developed by the clock generator circuit **82** is tied to the clocking input of a D-type flip-flop **100** (FIG. **2**). The D input to the flip-flop **100** is provided by the output of a two input NOR gate **102**. The inputs to the NOR gate **102** are the SLEEP* signal developed by the power control logic circuitry **42** and the SWN**0*** signal provided to the power control logic circuitry **42**. The NOR gate **102** is used to indicate and receive the depressing of the standby switch **58** when the system is in standby mode to begin the wake up procedure. When both signals are in a low state indicating that the computer system C is in standby mode and the user desires to wake up the computer system C, the low signal present at the D input is clocked to the Q or noninverting output of the flip-flop **100** on the next rising edge of the CLK signal. The noninverted output of flip-flop **100** is provided to the D input of a D-type flip-flop **104**. The clocking signal of the second D-type flip-flop **104** is also the CLK signal. The inverted output of flip-flop **100** and the non-inverted output of flip-flop **104** are inputs to a two input NAND gate **106**. The output of the two input NAND gate **106**, whose active condition is a low pulse one CLK signal cycle in length after the standby switch **58** is released, is provided to one input of an AND gate **108**, whose output is applied to the reset input of a sleep D-type flip-flop **110**.

The sleep flip-flop **110** is one bit in a register referred to as the power control register **109**. The power control register **109** contains the storage elements which control and indicate which of the peripheral devices and the system are powered on. The power control register **109** is readable by the computer system C and writeable by the computer system C. The various additional storage elements comprising the power control register **109** are a modem D-type flip-flop **112**, a RAMDAC d-type flop-flop **113**, a hard disk D-type flip-flop **114**, and an LCD D-type flip-flop **116**. All of the flip-flops in the power control register **109** have their D inputs coupled to the appropriate lines of the data bus **20** through buffers (not shown) and have their clocking inputs tried to a signal referred to as PWRCTLWR*. The PWRCTLWR* signal is a signal which indicates that a write operation has been directed to the power control register **109** and is of a phase such that the rising edge of the signal is available when the data is valid at the inputs to the various flip-flops. The non-inverted outputs of the power control register flip-flops are combined to form the PWRCTL data lines and are connected to the system address and data bus **20** via appropriate buffering devices (not shown).

When the computer system C is in standby mode, which may be referred to as being asleep, and the operator presses the standby switch **58**, a one CLK signal length pulse is developed at the output of the NAND gate **106** when the standby switch **58** is released and is applied to the reset input of the sleep flip-flop **110**. This pulse resets the noninverting output of the sleep flip-flop **110**. The noninverting output of the sleep flip-flop **110** is connected to one input of a two input NAND gate **118**. The other input of NAND gate **118** is connected to the inverted output of the LCD flip-flop **160**. This dual connection of the sleep flip-flop output **110** and the LCD flip-flop **116** output is used in the preferred embodiment because of constraints relating to the powering sequence of the LCD **50**. Therefore when the output of the sleep flip-flop **110** goes low, the output of NAND gate **118** goes high and therefore the signal present at the D input of a D-type flip-flop **120** goes high. This flip-flop **120** is clocked by the inverted CLK signal is produced by an inverter **122**. When the next falling edge of the CLK signal is encountered, the SLEEP* signal, which is the non-inverted output of flip-flop **120**, goes high indicating that the computer system C is no longer in standby mode. The SLEEP* signal feeds back to NOR gate **102** to clear the pulse provided by NAND gate **106**.

The inverting output of flip-flop **120** is connected to the D input of a D-type flip-flop **124**. The clocking input to flip-flop **124** is provided by the CLK signal, so at the next rising edge of the CLK signal the noninverting output of flip-flop **124** goes low. This output of the flip-flop **124** is tied to one input of a two input OR gate **126**, with the other input of the OR gate **126** being the CLK signal. Thus, when the noninverting output of flip-flop **124** is low, the output of the OR gate **126** proceeds to follow the CLK signal and is referred to as the BCLK signal. This is the blocked clock or stopped cock signal for use with the power control logic circuitry **42** so that when the computer system C is in standby mode even the portions of the power control circuitry **42** which can be stopped are stopped.

When the computer system C is to enter standby mode, the inverting output of the LCD flip-flop **116** is in a high state because in the preferred embodiment it is desired that the LCD power be turned off prior to removing the clock from the various portions of the computer system C. The noninverting output of the sleep flip-flop **110** is set high on a following access of the CPU **22** to the power control register **109**, so that both inputs of the two input NAND gate **118** are high so that a low signal is presented to the input of flip-flop **120**. At the next falling edge of the CLK signal the SLEEP* signal goes low, indicating that the computer system C is in the standby mode and the inverting output of flip-flop **120** goes high, which output is then clocked through flip-flop **124** to stop operation of the clock to the other portions of the power control logic circuitry **42** by means of OR gate **126**.

The non-inverted output of the RAMDAC flip-flop **113** is supplied to one input of an OR gate **128**. The second input to OR gate **128** is the ACPWR signal, which indicates that AC power is applied. The output of the OR gate **128** is a RAMDACON signal to indicate the power should be turned on to the RAMDAC located in the display control adaptor **38**. As discussed, the RAMDAC is useful only with an external monitor in the preferred embodiment because the LCD display is not color and therefore there is no need to perform the necessary color pallette lookup performed by the RAMDAC. Therefore if the RAMDAC bit is set on or the computer system C is being powered by the external AC supply, the RAMDAC is turned on. Otherwise the RAMDAC is turned off to conserve power.

The non-inverted output of the modem flip-flop **112** is supplied to the D input of a D-type flip-flop **130**. The

clocking signal to this flip-flop is a signal referred to as CLK13μS which provides an approximate 13 microsecond clocking signal to flip-flop **130**. The output of flip-flop **130** is the MODEMON signal and is supplied to the D input of a second D-type flip-flop **132** and to one input of a two input EQUAL gate **134**. The MODEMON signal is supplied to an FET **66** to control the power to modem **30**. The second flip-flop **132** is also clocked by the CLK13μS signal and has its non-inverting output connected to the second input of the EQUAL gate **134**. The output of the EQUAL gate **134** is supplied to one input of a two input NAND gate **136**. The output of NAND gate **136** is referred to as the MODEMRST signal, the modem reset signal. The second input of the NAND gate **136** is connected to the RESET* signal, which is the main reset signal present in the computer system C. Assuming that the RESET* signal is high, the MODEMRST signal is pulsed high for one 13 microsecond CLK signal cycle when the modem flip-flop **112** output changes. Thus, there is a rest pulse after the modem **30** is turned on to allow the modem **30** to properly initialize itself.

The non-inverting output of the hard disk flip-flop **114** is the HDISKON signal and is connected to an FET **68** to control the power to the hard disk unit **48**.

The non-inverting output of the sleep flip-flop **110** and the inverting output of the LCD flip-flop **116** are provided to the two inputs of a NOR gate **138**. The output of the NOR gate **138** is the LCDON signal which is connected to an FET **70** to control the supply of power to the LCD **50**. The coupling of the SLEEP and LCD flip-flop output signals is to prevent the LCD power from being removed in improper sequence and possibly damaging the LCD **50**.

The computer system C includes a parallel printer interface **36**. In the preferred embodiment, this parallel printer interface **36** can be addressed at any one of three selectable addresses which are generally referred to as LPT1, LPT2 and LPT3. The selection of which of the three printer locations is defined by the state of two bits in a peripheral control register, the two signals corresponding to the two bits referred to as PCR<6> and PCR<5>. These two signals are provided to the gating inputs of a 4:1 multiplexer **150**, which has an inverted output (FIG. **4**). A signal referred to as the LPT1* signal is applied to the zero channel input of the multiplexer **150** and is true when an access is being made to the address of the LPT1 printer which, in the preferred embodiment, has an address of **3BC–3BF**. A signal referred to as LPT2*, which is indicative of an access to port address **37A–37F**, is connected to the second input of the multiplexer **150**. A signal referred to as LPT3*, which goes low when an access is made to the address **278–27F**, is connected to the third input to the multiplexer **150**. The fourth input to the multiplexer **150** is tied to a positive level. The output of the multiplexer **150** is a signal referred to as PTR, and goes high to indicate that an access is being made to the selected printer location. The PTR signal **150** is connected to one input of a four input OR gate **152**. Another of the inputs to this four input OR gate **152** is the output of yet another four input OR gate **154**. The four inputs to four input OR gate **154** are the HD1SK signal, the MODEM signal, the UART signal, and the KEYBD signal. These signals represent, respectively, accesses to the addresses of **1F0–1F7**, **2F8–2FF**, **3F8–3FF**, and **060** and **064**. When any one of these signals is present, this indicates that the CPU **22** or other device controlling the bus may be accessing one of these specified addresses.

A signal designated FLOPPY is supplied to one input of a series of three NOR gates **156**, **158** and **160**. The FLOPPY signal indicates an access request in the address range **3F0–3F7**, which the complete range for access to the floppy disk controller **32** in the preferred embodiment. However, because of certain features in other control sequences which are present in the computer system C that had to be retained for compatibility reasons, one address in the range cannot be utilized for inactivity montoring because this address is accessed on a relatively frequent basis to prevent other potential systems problems from occurring and does not necessarily indicate system activity. Therefore the FLOPPY signal must be combined with other bits of the address to determine that the specific undesired address is not being presented. The FLOPPY signal is first combined with the zero or least significant address signal by NOR gate **160** so that any access to an odd address produces a high level signal which is applied to one input of the OR gate **152**. The ADD<2> signal representing the second east significant bit of the address is supplied to the an input of a NOR gate **158** along with the FLOPPY signal, so that all addresses having a least significant hexadecimal digit in the range 4–7 are selected. The output from NOR gate **158** is supplied to one input of a two input OR gate **162**, whose output is connected to the fourth input of the four input OR gate **152**. The second input to the OR gate **162** is provided from a third NOR gate **156** whose inputs are the ADD<1> signal or next least significant bit of the address and the FLOPPY signal, so that the output of the NOR gate **156** goes high only when an address having a least significant hexadecimal digit of 0, 1, 4 or 5 is present. Thus, the NOR gates **156**, **158** and **160** produce a high level signal for addresses in the range of **3F0–3F7**, except when the address is **3F2**, which is the address accessed by the above-given problem.

The output of the four input OR gate **152** indicates that a proper address of the monitored devices has been presented on the address bus **20**. This signal is provided to one input of each of two different two input NAND gates **164** and **166**. The second input of the NAND gate **164** is a signal referred to as I/ORD, which indicates that a valid I/O address space or port read operation is in progress. The second input to the other NAND gate **166** is a signal referred to as the I/OWR signal, which indicates that a valid I/O address space write operation is in progress. The use of these two signals is necessary in combination with the addressing information to determine that the monitored devices are actually being accessed. The outputs of the NAND gates **164** and **166** are supplied to two inputs of an AND gate **168** whose output is the DEVACT* signal, which is low when a monitored device is being accessed. The DEVACT* signal is low only the length of the I/ORD or I/OWR signals in the preferred embodiment because the I/O control signals are present for shorter periods than the address information.

The DEVACT* signal is applied to one input of a two input NAND gate **200** (FIG. **3**). The second input to the NAND gate **200** is a signal designated ACTMONWR*, which indicates that a write operation is occurring to the activity monitor interval register. The ACTMONWR* signal is also supplied to the enabling input of a latch **202**. The data input signals to the latch **202** are provided by connection to the data bus **20**, so that the latch **202** is a first register or buffer contained in the activity monitor time T.

The output of the NAND gate **200** is connected to the clock input of a D-type flip-flop **204**. The D input is connected to a high level signal so that whenever the DEVACT* signal is deactivated to a high state indicating that an access to a monitored device has just completed, the flip-flop **204** is clocked. The noninverted output of the flip-flop **204** is connected to the D input of a second D-type flip-flop **206**. The clocking input of the flip-flop **206** is

supplied by the BCLK signal. The inverting output of the flip-flop **206** is connected to one input of a two input AND gate **208**, whose output is connected to the inverted chip enable input of a second latch **210**. This use of two latches **202** and **210** allows the activity monitor time T to be double buffered. Additionally, the register **210** includes an output which indicates that the value latched in the latch **210** is not zero. The clocking input signal to the second latch **210** is the BCLK signal.

The output of AND gate **208** is also connected to one input of a two input OR gate **212**, whose other input is the BCLK signal. The output of OR gate **212** is fed back to the reset input of flip-flop **204** so that each time the DEVACT* signal is propagated through the two flip-flops **204** and **206**, the first flip-flop **204** is cleared.

The inverting output of the second flip-flop **206** is also connected to one input of a two input NAND gate **214**. The output of the NAND gate **214** is connected to the D input of a D-type flip-flop **216** whose clocking input is supplied by the BCLK signal. The inverting output of the flip-flop **216** is connected to one input of an AND gate **218** and the output of the AND gate **218** is connected to the inverted load input of the countdown timer **220**, which forms the loadable portion of the timing elements of the activity monitor timer T. The timer **220** has an output which indicates when the timer **200** has reached a zero value. The output of the AND gate **218** is also connected to one input of a four input NAND gate **222** whose output is designated the ACTIVE* signal and indicates that a device has been active and the activity monitor timer T has not counted to zero. The NOTZERO signal provided by the latch **210** is connected to one input of the NAND gate **222** and the ZERO signal output from the timer counter **220** is provided to yet another input of the NAND gate **222**. The fourth and final input of the NAND gate **222** is a signal described as IRQ15CLR, which indicates that the interrupt request **15** has been cleared. The inputs to the NAND gate **222** are true only when the activity monitor time T is enabled by the value of the latch **210** not being zero, a device is not active as indicated by the output of AND gate **218**, the countdown timer **220** is at zero count and the level **15** interrupt has been cleared. This is a general condition that the computer system C has been inactive for a sufficient period of time as indicated by the value from which the activity monitor timer T counted down.

The IRQ15CLR signal and the NOTZERO signal are provided as two inputs to a three input AND gate **224**. The third input to AND gate **224** is a signal referred to as 5SEC which is a pulse having a width of one BCLK signal cycle and occurs every five seconds. This pulse is produced by a ripple counter **226** which has the BCLK signal as one input to produce the necessary pulse width, a second signal input of the CLK13μs signal to produce an initial clock cycle which is divided down to a five second cycle and a reset signal provided by the output of the AND gate **218**. The output of the AND gate **224** is provided to the enable input of the countdown timer **220** and is synchronized to the BCLK signal the clocking input to the countdown time **220**, so that the countdown timer **220** is advanced or decremented only one count per five second interval. The data outputs of the first latch **202** are connected in parallel to the data inputs to the second latch **210**, whose data outputs in turn are connected to the inverting data inputs of the countdown timer **220**. The inverted data outputs of the timer **220** are provided to the data bus **20** over a line or series of lines referred as to as the ACTMN data lines to provide the activity monitor timer value to the CPU **22**. In this way the CPU **22** can determine the actual countdown time remaining prior to entering a sleep or standby status.

The ACTIVE* signal is connected to the second input of NAND gate **214** and when the ACTIVE* signal goes low, this causes the output of NAND gate **214** to go high, so that on the second BCLK signal rising edge after a monitored device has been accessed, the countdown timer **220** is reloaded and the process is reinitiated and the ACTIVE* signal returns to a high state. This pulse width of the ACTIVE* signal is sufficient for the level **15** interrupt to be generated as needed to start execution of the interrupt routine which determines if and when it is appropriate to go into standby mode. The two latches **202** and **210** and the two flip-flops **206** and **216** are reset by a low level of the RESET* signal.

Thus, the combination of flip-flops **204**, **206** and **216** and various logic gates **200**, **208**, **212**, **214** and **218** reset and retrigger the countdown timer **220** each time a monitored device is activated. For example, a clocking signal appears at flip-flop **204**, which then provides a high signal to the D input of flip-flop **206**, whose inverting output in turn goes low at the next rising edge of the BCLK signal. This low output on the inverting output of flip-flop **206** enables the second latch **210** to be reloaded on the next rising edge of the BCLK signal and the output of flip-flop **216** to go low on that same BCLK signal edge. On the next BCLK signal rising edge after that, the countdown timer **220** is reloaded and thus the countdown process recommences.

The ACTIVE* signal is applied to one input of a two input NAND gate **250** (FIG. 5). The output of this NAND gate **250** is connected to the D input of a D-type flip-flop **252**. This flip-flop **252** is clocked by the BCLK signal. The non-inverting output of flip-flop **252** is the active status bit of the interrupt request register and is provided to the processor by means of the IRQDATA<7–0> lines and appropriate buffering. The non-inverting output of flip-flop **252** is also supplied to the D input of a flip-flop **254**, which flip-flop **254** is also clocked by the BCLK signal. The inverting output of the first flip-flop **252** is connected to the second input of the NAND gate **250** and to the first input of a NOR gate **256**. By this connection, the D input to the flip-flop **252** remains high after the initial pulse is received on the ACTIVE* signal so that the state of the activity status of the computer system C can be determined at any time. The output of the second flip-flop **254** is provided to the second input of the NOR gate **256**, whose output is connected to one input of a six input NOR gate **258**. The output of the two input NOR gate **256** is a pulse having a length of one BCLK signal cycle. In this manner only a short pulse is formed and provided to the NOR gate **258** when the inactivity timeout is reached to cause the IRQ15REQ signal to be developed.

As can be seen by the fact that there are six inputs to the NOR gate **258**, there are a plurality of different ways in which the IRQ15REQ signal can be generated. These additional ways are provided in the preferred embodiment to allow the computer system C to know the states of various events and switches relating to power usage and to warn the user at appropriate intervals. For example, the ACPWR* signal is provided to the D input D-type flip-flop **260**, whose clocking signal is the BCLK signal. The non-inverting output of the flip-flop **260** is connected to the D input of a D-type flip-flop **262** and to one input of a two input XOR gate **264**. The second input to the XOR gate **264** is provided by the noninverting output of the second flip-flop **262**, which flip-flop is clocked by the BCLK signal. The output of the XOR gate **264** is thus a one BCLK signal cycle length pulse which occur whenever the condition of the AC power

changes and is provided to the NOR gate **258** to generate the IRQ15REQ signal. The state of the ACPWR* signal is stored and transmitted to the IRQDATA lines by the inverting output of the flip-flop **260**. Thus, the NOR gate **258** is utilized to allow the computer system C to note any change in the AC power status such as, for example, when the AC adaptor is provided or removed. This allows the computer system C to note when it is entering battery-powered operation and thus the power conservation mode may be appropriate. This operation is seen in more detail in the flowchart illustrations of the operating sequences of the computer system C.

Similar flip-flop circuits are present for utilizing the LOWBAT1 and LOWBAT2 signals. Thus two inputs to the NOR gale **258** indicate whenever the computer system C has changed the battery charge status to or from LOWBAT1 to LOWBAT2. The actual LOWBAT signals are latched by a first D-type flip-flop **290** and **292** in the series and the noninverted outputs are presented to the IRQDATA lines. A second D-type flip-flop **294** and **296** is closed by the BCLK signal and has the D input connected to the preceding flip-flop **290** and **292** noninverting output. The noninverting outputs of the flip-flops **290** and **292** and **294** and **296** are the inputs to an XOR gate **297** and **298**, whose output is connected to NOR gate **258** to produce the necessary signal to trigger a level **15** interrupt.

The 5SEC signal is combined with the latched LOWBAT2 and LOWBAT1 signals by AND gate **266** whose output is connected to NOR gate **258**, so that whenever the computer system C is in a LOWBAT2 condition, every five seconds a level **15** interrupt is received to allow the user to be reminded that he is in LOWBAT2 condition and that there is very little energy remaining in the batteries **54**.

The final input to NOR gate **258** is based on the SLEEP* signal and the SWN0* signal. The combination of the signals is used to indicate that the user has pressed the standby switch **58** while the computer system C is active and that the computer system C is to go to an inactive status or standby, based on the user demand. The SLEEP* signal is provided to the D input of a D-type flip-flop **268** with the SWN0* signal provided to the clocking input. In that way, if the SLEEP* signal is high indicating that the computer system C is active, when the standby switch **58** is depressed, a high state is produced at the noninverting output transmitted to the noninverting output of the flip-flop **268**, which is connected to the D input of a next D-type flip-flop **270**. The clocking signal to the second flip-flop **270** is provided by the BCLK signal. The noninverting output of flip-flop **270** is provided to the IRQDATA lines and is considered to be the standby switch signal which is interpreted by the CPU **22**. The inverted output of flip-flop **270** is provided to one input of a NOR gate **272**. The non-inverting output is also supplied to the D input of a third D-type flip-flop **274**, which is clocked by the BCLK signal. The non-inverting output of flip-flop **274** is connected to the second input of the NOR gate **272**, so that in a manner similar to the circuitry relating to the ACTIVE* signal, only a short pulse one BCLK signal cycle in length is presented to the NOR gate **258** to indicate the user's desire to place the computer system C in standby mode.

The output of the NOR gate **258** is connected to one input of a NAND gate **276**, whose output is connected to the D input of the IRQ15 D-type flip-flop **278**. The IRQ15 flip-flop **278** is clocked by the BCLK signal and has the inverting input coupled back to the second input of the NAND gate **276**. In this way, whenever a pulse is received by the NOR gate **258**, the signal is detected by the IRQ15 flip-flop **278** and latched in until the IRQ15 flip-flop **278** is reset. The non-inverting output of the IRQ15 flip-flop **278** is the IRQ15REQ signal which is supplied to the interrupt controller which is interfaced to the CPU **22** and handles the processing of the interrupt request.

There are two remaining flip-flops utilized in the power conservation circuitry relating to the interrupt circuitry and these are the IRQ15EN D-type flip-flop **280** and the IRQ15CLR D-type flip-flop **282**. The IRQ15EN flip-flop has its D input coming from the data bus **20** and is clocked by a signal referred to as the IRQ15WR* signal, which indicates that a wire operation is occurring to the IRQ15 register. The IRQ15 register location provides the states of the signals forming the IRQDATA lines during a read operation and allows data to be written to the IRQ15EN and IRQ15CLR flip-flops **280** and **282** during write operations. The data present on the data bus is latched at this time and the output of the IRQ15EN flip-flop **280** is provided to the IRQDATA lines and is the IRQ15EN signal.

Also clocked in by the IRQ15WR* signal is another bit of the data bus **20**, which is the IRQ15CLR signal. When a high state of this signal is clocked in, the non-inverting output of the IRQ15CLR flip-flop **282** is the IRQ15CLR signal, goes to a high state and is fed back to the IRQDATA lines for evaluation by the CPU **22**. The inverting output of the IRQ15CLR flip-flop **282** is the IRQ15CLR* signal and is provided as one input to a two input AND gate **284**. The remaining input to this AND gate **284** is the RESET* signal which is also provided to the reset inputs of the IRQ15EN and IRQ15CLR flip-flops **280** and **282** and to the flip-flops in the LOWBAT1, LOWBAT2 and ACPWR portions of the circuitry. The output of the AND gate **284** is a clear signal used to clear the IRQ15 flip-flop **278** and to clear the active flip-flops **252** and **254** and the standby switch flip-flops **268**, **270** and **274**.

This completes the detailed description of the circuitry utilized in the computer system C according to the present invention to provide the power conservation features of the present invention. This circuitry is used in conjunction with certain operating sequences provided in the read-only memory space of the computer system C to perform the power conservation functions of the present invention.

When the power to the computer system C is initially turned on, the power on sequence **300** (FIG. **6**A) is commenced. The first step of the power on sequence **300** is step **302**, where a determination is made by reading the IRQDATA lines as to whether the computer system C is in a LOWBAT2 condition. If the computer system C is in a LOWBAT2 condition, control proceeds to step **304** where 12 beeps are issued to warn the user of this state and control proceeds to step **305** where the computer system C is halted. Thus, when the computer system C is in a LOWBAT2 condition, it cannot be used until it is removed from this condition. This is done because it is presumed that there is insufficient energy in the batteries **54** to allow any significant activity of the computer system C and so the possibility of losing data is now allowed.

If the computer system C is not in a LOWBAT2 condition, control transfers from step **302** to step **306** where other activity relating to powering up the system is performed. After completing this necessary activity, control proceeds to step **308** where a determination is made as to whether the values contained in the CMOS RAM **26** are valid. The CMOS RAM **26** is used to contain certain values relating to the configuration of the system C which allows the computer system C not to ask the user this information or have the

information stored in a file contained on a disk. If the CMOS information is valid, control proceeds to step **310** where the computer system C determines whether power conservation should be activated. There are two bits contained in a register in the computer system C which are used to indicate the desired initial state of the power conservation system. The three states that are available are the power conservation On State, the power conservation Off State, and a power conservation Auto State. In the power conservation On State, the power conservation techniques of the present invention are utilized at all times. In the power conservation Off State, the power conservation techniques are not utilized. The preferred initial state is the power conservation Auto State, which is utilized so that the computer system C and determine which operating system will be controlling the operations of the machine after booting operations are completed. Thus, power conservation in the Auto State is enabled when certain operating systems are employed and is not operational when certain other operating systems are employed. This allows the greatest flexibility of operation.

If the computer system C determines in step **310** that the power conservation is selected to be on, control proceeds to step **312** where the power conservation mode is enabled and the system inactivity timer or activity monitor timer T is set with a value obtained from the CMOS **26**. Control then proceeds to step **314**.

If it was determined in step **310** that the power conservation mode was not to be enabled on at all times, control proceeds to step **316** where a determination is made as to whether power conservation features are to be turned off. If so, control proceeds to step **318** where the power conservation off flag is set for further use in later operations and then control proceeds to step **314**. If the power conservation Off State was not selected in step **316**, or if the CMOS was determined to be not valid in step **308**, control proceeds to step **320** where the computer system C sets the auto delay counter for a sufficient interval, generally 70–85 seconds, so that the remaining portions of the power up routine and operating system are executed and locked, and an interrupt is developed after that period of time. This allows sufficient time for the operating system to be installed in the computer system C and begin controlling operation of the computer system C. If the operating system does not allow access to the ROM memory portion where the auto delay interrupt routine is located, then a proper entry to that selected interrupt will not be obtained, and power conservation will not be enabled. Also in step **320**, the IRQ15 is cleared and disabled by writing the proper values to the IRQ15 register. Finally in step **320**, the system inactivity timer T is set to the default value.

Control then proceeds from step **320** to step **314** where the computer system C determines if the computer system is being powered by the batteries **54**. If so, control proceeds to step **322** where a second check is made to see if the CMOS **26** is valid. If so, control proceeds to step **324** (FIG. **6B**) where the system inactivity timer T is set with the value contained in the CMOS **26**. If the CMOS **26** is not valid, control proceeds to step **326** where the system inactivity timer T is set with a default value. Control proceeds from step **326** or from step **324** to step **328**.

If it was determined in step **314** that the system was not powered by the battery, that is, was powered by the AC adaptor or from an external base unit, control proceeds from step **314** to step **330** where the system inactivity time is set to zero because there is no need to conserve power when powered from the external source and a zero value in the latch **210** prevents the ACTIVE* signal from being asserted. Control proceeds from step **330** to step **328**, where other necessary power up and self-test activities are preformed. Control then proceeds from step **328** to step **331** where the computer system C makes a second determination as to whether a LOWBAT2 state exists. If so, control proceeds to step **332** where the user is again prompted with 12 beeps as an audible indication that the LOWBAT2 condition exists. Control then proceeds to step **334** which is the beginning of the boot sequence in which the operating system is loaded in from the storage media.

If the computer system C is not in a LOWBAT2 condition, control proceeds from step **331** to step **336** where a test is made to see if the computer system C is in a LOWBAT1 condition. If so, control proceeds to step **338** where 6 beeps are issued, thus allowing the user to distinguish between the LOWBAT1 and LOWBAT2 conditions audibly. Control then proceeds from step **338** to step **334**, which is also where control would proceed from step **336** if the computer system C was not in a LOWBAT1 condition. The computer then proceeds to boot up and load the operating system.

If the selected power conservation mode was automatic, a timer is set in step **320** with the auto delay interrupt time and eventually an auto delay interrupt occurs. If the operating system in control of the machine at that time is one which allows access to the read-only memory portions of the computer system C containing the proper routine, then control proceeds to the auto delay interrupt sequence **340** (FIG. **6C**). Control starts in sequence **340** by having the computer system determine whether IRQ15 has been enabled in step **342**. If IRQ15 is enabled, this indicates that the power conservation mode is already active to cause interrupts and thus be recognized for action. If IRQ15 is enabled, control proceeds to step **344**, where control is returned to the interrupted sequence. If IRQ15 is not enabled in step **342**, control proceeds to step **346** where a determination is made if the desired power conservation mode is off. If so, control proceeds to step **344** and returns. If the power conservation mode is not off, control proceeds from step **346** to step **348** where a determination is made to see if it is time to enable power conservation. If not, control proceeds to state **344**. If it is time, control proceeds to step **350** where IRQ15 is enabled, and the IRQ15DATA lines or status value is saved for later use. Control then proceeds to step **344**, and operation proceeds in the interrupted sequence.

Whenever the inactivity timer has timed out such that it is appropriate to enter standby mode or when one of the various parameters related to power conservation such as the power source, the battery condition, or a user request for standby status is developed, a level **15** interrupt or IRQ15 is requested, and an IRQ15 interrupt sequence **400** is performed. The preferred embodiment uses IRQ15 for this purpose because it is generally not a defined interrupt and thus is relatively available with a minimum number of conflicts with application software. The IRQ15 sequence **400** begins at step **402** where the computer system C reads the IRQ15 status values from the IRQDATA lines and retrieves the old IRQ15 status values from a saved location in memory. Control proceeds from step **402** to step **404** where write operations are performed to the IRQ register so that the pending IRQ15 is cleared and remains enabled. Control then proceeds to step **406** where a determination is made as to whether the system was previously AC powered. If so, control proceeds to step **407** where a determination is made to determine if the computer system C is switching to battery powered operation. If it is powered by an external source, control proceeds to step **408** where a determination is made as to whether the old and new IRQ15 status values

are equal. If so, control proceeds to step **410** which determines if the user has cancelled the standby request by pushing the standby key a second time after the initial time which initiated the execution of this sequence. If not, control proceeds to step **414** where the computer system determines if the battery is in the LOWBAT2 condition. If the battery charge it not in the LOWBAT2 condition, step **414** transfers control to return step **412**. However, if the LOWBAT2 condition exists, control proceeds to step **416** where 12 beeps are issued to remind the user of the presence of the LOWBAT2 state. This path is executed on 5 second intervals because the 5 second counter is one input to the IRQ15 NOR gate **258** via AND gate **266** and is not provided to the IRQDATA lines for direct determination by the computer system C.

If the old and new IRQ15 status values were different, control proceeds from step **408** to step **418** where a determination is made to see if the state of the LOWBAT1 condition has changed. If so, this qenerally indicates that a LOWBAT1 condition has developed and control proceeds to step **420**, where 6 beeps are emitted to indicate the presence of the LOWBAT1 condition to the user, the battery charge LED **64** is set to flash at a 1 Hz rate, and the system inactivity timer T is set at a value of 2 minutes. The system activity timer is set at this low value from the generally 10 minutes used before low battery conditions exist to allow increased conservation of the energy remaining in the batteries. From step **420**, control proceeds to step **422** where control is returned to the interrupted sequence.

If the state of the LOWBAT1 bit in the IRQ15 status register has not changed, control proceeds from step **418** to step **424** (FIG. 7B). In step **424**, the computer system C determines whether the state of the LOWBAT2 bit has changed. If it has changed, control proceeds to step **426** where the computer system C causes 12 beeps to be emitted to indicate to the user that the system C has now entered a LOWBAT2 condition, and the battery charge LED **64** is flashed at a 2 Hz rate to indicate the urgency of the situation. Also in step **426**, the system inactivity time is set at a very short 20 consecutive second interval so that should any of the monitored devices not be used for 20 seconds, the system will automatically enter standby mode, and once standby mode has been entered from the LOWBAT2 condition, it is not possible to recover or restart the machine without plugging in an external power source. This very short time is used because it is presumed that there is very little energy left in the batteries **54**, and that if any significant use is made of the various peripheral devices, any information existing in the memories may be lost. Control proceeds from step **426** to step **422**, and control is returned to the interrupted program.

If the LOWBAT2 bit has not changed, control proceeds from step **424** to step **428** where the CPU **22** determines whether the standby switch **58** has been depressed by the user. If so, 2 beeps are emitted to acknowledge the switch depression and the system inactivity time is set to 10 seconds. The system is not immediately made inactive at this time so that various operations which may be active can be completed. For example, the user may start a file transfer program or start a save operation from this applications program and be ready to leave the machine, so he starts operation, depresses the standby button **58** and leaves. If the system were to go into standby mode immediately, the data would not necessarily be saved away onto the appropriate media, but could be lost if the user remained away for a significant period of time. Therefore, the system first waits until all file transfer operations are completed and then enters a standby mode. After step **430**, control proceeds to step **422**, and control is returned to the interrupted program.

If the standby switch **58** has not been hit as determined in step **428**, control proceeds to step **432**, where a determination is made to see whether AC or external power has been applied to the computer system C to charge the batteries. If so, it is no longer necessary for the system to be in power conservation mode and to receive the system inactivity interrupts, so in step **434** the system inactivity time is set to zero. As mentioned in the discussion of the register **210**, the NOTZERO signal of latch **210** develops and is one input to a four input NAND gate **222**, so that when a zero value is written to the system inactivity latches **202** and **210**, the output of this NAND gate **222** is made high because the NOTZERO signal goes low. Thus, there are no activity monitoring events provided to the flip-flops **252** and **254**, and the inactivity interrupts are not generated. However, the power source conversion and the battery monitoring functions remain active. After step **434** is completed, control is returned to step **422** for a return to the interrupted sequence.

If AC power has not been applied as determined in step **432**, control proceeds to step **436** where it is evaluated as to whether AC power has been removed. If AC power has been removed, this is an indication that battery power operation has commenced, and in step **438**, a check is made to see whether the CMOS **26** is valid. If so, in step **440**, the system inactivity time is set from the CMOS value, while if the CMOS **26** is not valid in step **442**, the system inactivity time is set to a default value. Control proceeds from either step **440** or **442** to step **422** and to the interrupted program.

If AC power was not removed, this has completed all the possibilities which could cause a power conservation interrupt except for the inactivity timer, and control thus proceeds from step **436** to step **444** (FIG. 7C). In step **444**, 2 beeps are issued to indicate that the system is about to go into standby mode, the inactivity register is cleared, and the non-maskable interrupt is disabled. Control then proceeds to step **446** where the hard disk **48** is placed in standby mode by issuing a proper command to the hard disk controller **34** to cause the hard disk **48** to enter this state. This state allows the hard disk **48** to start spinning down in a proper manner. Control then proceeds to step **448** where the power is turned off to the LCD **50** and to the backlight. After turning the power off, control proceeds to step **450** for a delay of 1 second. This time is to allow the hard disk to spin down. After this 1 second delay is completed, control proceeds to step **452**, where a command is issued to the floppy disk controller **32** to power off the floppy disk controller **32**. The next step is step **454**, where the power is turned off to the modem **30** and the hard disk **48**, thereby completing the shutting off of power to the major devices in the computer system C which can be powered down. The next step in step **456**, where the SLEEP bit in the power control register is set, thus triggering a series of events where miscellaneous circuitry including the floppy disk unit **46** has its power removed and the clock is stopped.

In step **458** a large number of no operation instructions are performed by the CPU **22**. A series of no operation instructions is included so that the system will definitely stop during this interval and will not stop during a potential instruction in which data may need to be transferred for some reason. It is assumed that the system comes to a stop in the middle of this step **458** when performing the no operation instructions. The system stops because the clock has been stopped to the CPU **22** and so the CPU **22** cannot direct any operations. The system is then in standby mode and at its lowest power consumption mode until it is

attempted to be awakened by having the user hit the standby switch **58**, which would then allow the clock to be restarted according to the circuitry shown in FIGS. **1** and **2**.

After the standby switch **58** has been hit and the clock is successfully started, a series of no operation instructions is still performed in step **458** to allow the system to fully come into operation with no truly critical instructions being performed. After the system is thus safely operating and the no operation instructions are completed, in step **460** a determination is made whether the computer system C is currently in LOWBAT2 mode. If it is in this very low energy remaining condition of LOWBAT2, control proceeds to step **456**, and the computer system C once again puts itself into standby mode. Therefore, the computer system C does not awaken itself when it is in the LOWBAT2 condition. If the machine were attempted to be restarted in LOWBAT2, the mere energy of powering on of the appropriate devices might drain the remaining energy, and any data which is present in the memory **24** would be lost.

Assuming then that the computer system C is not in the LOWBAT2 state, control proceeds to step **462** where the current IRQ15 status value is saved, the time and data values contained in the memory **24** are updated from the real time clock contained in the CMOS **26**, and the non-maskable interrupt is enabled. It is necessary to update the time because clearly some time has passed during the standby state and the system, for its proper operation, needs to be informed of the proper time. While this is understood to involve a discontinuity, this is considered preferable to other options.

Control then proceeds to step **464** where the power to the modem **30** and hard disk **48** is turned on to allow their operation to commence. In step **466**, the floppy disk subsystem is reset to allow its operation, and the disk changed line is set. The disk changed line is a line which indicates that the floppy disk which was present in the floppy disk until **46** may have changed, and therefore, it is necessary to redetermine directory information and other information contained on the disk. This line must be set in this step because it is quite possible that during the standby state the user has exchanged floppy disks, and because the system is in a standby state, the change would not be noticed. The computer system C would try to access the new floppy disk using the old floppy disk information with erroneous results.

Control then proceeds from step **466** to step **468** where the power to the LCD **50** and its backlight are turned on. In step **470**, the keyboard buffer is flushed to remove any possible keystrokes or stray keystrokes which may have developed during portions of the standby sequence or were developed due to the various powering on of various items. Also in step **470**, the system inactivity time is set to the last value that was present and then control proceeds to step **472** and to the interrupted program, thus completing operation of the standby sequence.

Thus, the computer system according to the present invention monitors various power consumption related events, indicates certain changes to the user and enters an inactivity state upon an appropriate period of time after monitored system devices have been used.

The foregoing disclosure and description of the invention are illustrative and explanatory thereof, and various changes in the size, shape, materials, components, circuit elements, wiring connections and contacts, as well as in the details of the illustrated circuitry and construction and method of operation may be made without departing from the spirit of the invention.

We claim:

**1**. An apparatus for use with a battery powered computer system for reducing power consumption of the battery powered computer system, the computer system including various circuitry, portions of which is clocked, the apparatus comprising:

an address and data bus for communicating address and data information in the computer system;

a plurality of peripheral devices coupled to said address and data bus, said peripheral devices being accessed over said address and data bus by use of address values associated with each said peripheral device, each said peripheral device capable of being powered off;

means coupled to said address and data bus for accessing said peripheral devices by presenting address values associated with said particular peripheral device on said address and data bus;

means coupled to said address and data bus for analyzing the address values presented on said address bus by said means for accessing to determine if one of said peripheral devices is being accessed and producing a signal indicative thereof;

means coupled to said address value analyzing means and responsive to said address value analyzing means signal for timing an interval since any one of said peripheral devices has been accessed by said accessing means; and

means coupled to said timing means and said peripheral devices for powering off said peripheral devices when said interval exceeds a preset amount to enter a reduced power consumption state.

**2**. The apparatus of claim **1**, further comprising: means coupled to portions of the circuitry for enabling power to said circuitry portions; and

means coupled to said timing means and said enabling power means for disabling power to the coupled circuitry portions when said interval exceeds a preset amount.

**3**. The apparatus of claim **1**, further comprising:

system clock means for providing a system clock to the clocked portions of the circuitry included in the computer system; and

means coupled to said timing means and said system clock means for disabling the system clock to the circuitry portions when said interval exceeds a preset amount.

**4**. The apparatus of claim **1**, further comprising:

means for disabling said powering off means when the computer system is powered from an alternating current electrical source.

**5**. The apparatus of claim **1**, further comprising:

means for powering on said peripheral devices after they have been powered off by said powering off means.

**6**. The apparatus of claim **5**, wherein said means for powering on includes a switch for activation by a user to indicate a desire to leave the reduced power consumption state.

**7**. The apparatus of claim **5**, further comprising:

means for monitoring the remaining battery energy; and

means coupled to said remaining battery energy monitoring means and said powering on means for disabling said means for powering on said peripheral devices when the remaining battery energy of the computer system is below a preset level.

8. The apparatus of claim 1, further comprising:

means for disabling said powering off means when desired by a user.

9. The apparatus of claim 1, further comprising:

means for initially disabling said powering off means;

means for allowing an operating system to take control of operations of the computer system;

means for interrupting operation of the computer system after the operating system has taken control; and

means responsive to said interrupt for enabling said powering off means when the controlling operating system allows response to said interrupt.

10. The apparatus of claim 1, further comprising:

means for monitoring the remaining battery energy; and

means coupled to said remaining battery energy monitoring means and said powering off means for reducing the preset amount of said interval when the remaining battery energy of the computer system is below a first given level.

11. The apparatus of claim 10, further comprising:

means coupled to said remaining battery energy monitoring means and said powering off means for further reducing the preset amount of said interval when the remaining battery energy is below a second given level, said second given level being less than said first given level.

12. The apparatus of claim 1, further comprising:

means responsive to a signal from a user for reducing the preset amount of said interval.

13. The apparatus of claim 1, further comprising:

means responsive to a command from a user for modifying the preset amount of said interval.

*14. A computer system adapted to switch between normal power consumption and reduced power consumption modes, comprising:*

*at least one peripheral device which draws, when the computer system is in a normal power consumption mode, an amount of power sufficient to support normal operation of said peripheral device when accessed by a peripheral device access address signal and which draws, when the computer system is in a reduced power consumption mode, a below normal or zero amount of power;*

*a central processing unit operable to generate the peripheral device access address signal;*

*a communication pathway connected with said central processing unit and said peripheral device for facilitating communication between said central processing unit and said peripheral device, said communication pathway including a bus connected with said central processing unit for receiving the peripheral device access address signal generated by said central processing unit; and*

*a power control circuit functionally separate from said peripheral device operable to cause said computer system to switch between a normal power consumption mode and a reduced power consumption mode by generating a power reducing control signal upon receipt of an elapsed time signal, said power control circuit including*

*an access address detector connected with said bus operable to determine when said central processing unit has generated a peripheral device access address signal and to generate a timer reset signal in response thereto, and*

*a timer connected with said address detector to receive said timer reset signal, operable to determine the elapsed time since a timer reset signal was last received from said address detector, and to generate the elapsed time signal when the elapsed time exceeds a predetermined elapsed time limit,*

*whereby the computer system assumes a reduced power consumption mode as a result of said power control circuit generating said power reducing control signal.*

*15. The system of claim 14, wherein said computer system is adapted to be connected with and receives power from a battery.*

*16. The system of claim 15, further comprising means for adjusting said predetermined elapsed time limit when a voltage of said battery drops below a predetermined level.*

*17. The system of claim 15, further comprising means for monitoring the remaining energy of said battery.*

*18. The system of claim 14, wherein said computer system is adapted to be connected with and receives power from an AC power source.*

*19. The system of claim 14, further comprising means for resetting said timer circuit when the computer system is powered up.*

*20. The system of claim 14, further comprising means for disabling said power control circuit when said computer system is powered by an AC power source.*

*21. The system of claim 20, further comprising means for reenabling said power control circuit when said computer system detects a change from being powered from an AC power source to a battery power source.*

*22. The system of claim 14, wherein said access address detector determines if said central processing unit has generated any one of a plurality of peripheral device access address signals corresponding, respectively, to a plurality of peripheral devices, and generates a timer reset signal in response thereto.*

*23. The system of claim 14, further comprising a system clock source operable to provide a system clock signal to clocked portions of said computer system and a disabling circuit for disabling said system clock source when said elapsed time exceeds said predetermined elapsed time limit.*

*24. The system of claim 14, further comprising a switch for activation by a user for disabling said power control circuit.*

*25. The system of claim 14, further comprising means for modifying said predetermined elapsed time limit.*

*26. The system of claim 14, wherein said timer is reset when said computer system is powered up.*

*27. The system of claim 14, further comprising means for powering off portions of the circuitry of said computer system when the elapsed time exceeds said predetermined elapsed time limit.*

*28. The system of claim 14, wherein said at least one peripheral device is one of a floppy disk drive, a keyboard, a modem, a hard disk drive, a serial communications device and a parallel communications device.*

*29. The system of claim 14, wherein said timer comprises a countdown timer and said timer reset signal resets said countdown timer to a full count.*

*30. The system of claim 14, wherein said power control circuit comprises decode logic.*

*31. The system of claim 14, wherein the generation of said elapsed time signals is delayed in response to data transfer on said bus.*

*32. The system of claim 14, further comprising means external to said power control circuit for increasing the power consumed by said peripheral device after the computer system is in a reduced power consumption mode.*

33. The system of claim 14, wherein said power control circuit is responsive to both said peripheral device addresses and to address qualifiers associated with said addresses.

34. The system of claim 14, wherein the power control circuit causes the power consumed by said central processing unit to be reduced.

35. A computer system adapted to switch between a normal power consumption mode and a reduced power consumption mode, comprising:

at least one peripheral device which draws, when the computer system is in an operational power consumption mode, an amount of power sufficient to support functional operation of said peripheral device when accessed by a coded peripheral device address signal and which draws, when the computer system is in a reduced power consumption mode, a below normal or zero amount of power;

a central processing unit operable to generate the peripheral device access address signal;

a communication pathway connected with said central processing unit and said peripheral device for facilitating communication between said central processing unit and said peripheral device, said communication pathway including a bus connected with said central processing unit for receiving the coded peripheral device address signals generated by said central processing unit; and

a power control circuit functionally separate from said peripheral device operable to cause said computer system to switch between an operational power consumption mode and a reduced power consumption mode by generating a power reducing control signal upon receipt of an elapsed time signal, said power control circuit including

an access address detector, in communication with said bus, to receive in un-decoded form the coded peripheral device address signal and to generate a timer reset signal in response thereto, and

a timer connected with said address detector to receive said timer reset signal, to determine the elapsed time since a timer signal was last received from said address detection circuit, and to generate the elapsed time signal when the elapsed time exceeds a predetermined elapsed time limit,

whereby the computer system assumes its reduced power consumption mode when said peripheral device is caused to draw a below normal or zero amount of power.

36. The system of claim 35, wherein said computer system is adapted to be connected with and receives power from a battery.

37. The system of claim 36, further comprising means for adjusting said predetermined elapsed time limit when a voltage of said battery drops below a predetermined level.

38. The system of claim 36, further comprising means for monitoring the remaining energy of said battery.

39. The system of claim 35, wherein said computer system is adapted to be connected with and receives power from an AC power source.

40. The system of claim 35, further comprising means for resetting said timer when said computer system is powered up.

41. The system of claim 35, further comprising means for disabling said power control circuit when said computer system is powered by an AC power source.

42. The system of claim 41, further comprising means for reenabling said power control circuit when said computer system detects a change from being powered from an AC power source to a battery power source.

43. The system of claim 35, wherein said access address detector determines if said central processing unit has generated any one of a plurality of coded peripheral device access address signals corresponding, respectively, to a plurality of peripheral devices, and generates a timer reset signal in response thereto.

44. The system of claim 35, further comprising a system clock source to provide a system clock signal to clocked portions of said computer system and a disabling circuit for disabling said system clock source when said elapsed time exceeds said predetermined elapsed time limit.

45. The system of claim 35, further comprising a switch for activation by a user for disabling said power control circuit.

46. The system of claim 35, further comprising means for modifying said predetermined elapsed time limit.

47. The system of claim 35, wherein said timer is reset when said computer system is powered up.

48. The system of claim 35, further comprising means for powering off portions of the circuitry of said computer system when said elapsed time exceeds said predetermined elapsed time limit.

49. The system of claim 35, wherein said at least one peripheral device is one of a floppy disk drive, a keyboard, a modem, a hard disk drive, a serial communications device and a parallel communications device.

50. The system of claim 35, wherein said timer comprises a countdown timer and said timer reset signal resets said countdown timer to a full count.

51. The system of claim 35, wherein said power control circuit comprises decode logic.

52. The system of claim 35, wherein said power control circuit provides a notification signal to said central processing unit.

53. An apparatus for reducing power consumption of a computer system having addressable peripheral devices, the system including address and data bus means for enabling communication of information in said computer system, and microprocessor means for accessing each of said peripheral devices by pressing its coded address on said address and data bus means, said apparatus for reducing power comprising:

means for connection to individual ones of said peripheral devices for removing and/or reducing power to those peripheral devices;

power control means for centrally monitoring said address and data bus means, for centrally detecting in un-decoded form addressing of individual peripheral devices and for centrally producing a signal indicative thereof;

timing means responsive to said signal for establishing a timing interval each time addressing of at least one of said peripheral devices is detected; and

means, responsive to the established timing interval exceeding a preset amount, for operating the means for connection to individual peripheral devices for removing and/or reducing power to the peripheral devices, to cause said computer system to enter a reduced power consumption state.

54. The apparatus according to claim 53, wherein said timing interval is established by a timer common to all the monitored peripheral devices and is reestablished consequent to each detected peripheral device addressing.

55. The apparatus according to claim 53, wherein said timing interval is established or re-established by resetting a countdown time.

56. The apparatus according to claim 53, further comprising means for reducing power consumed by said microprocessor when said timing interval exceeds the preset amount.

57. The apparatus according to claim 53, wherein said power control means comprises an analyzer that produces a signal on detection of an address value presented on said address and data bus, and said timing interval is established or reestablished in response to said signal.

58. The apparatus according to claim 57, wherein said microprocessor presents address values and address qualifiers to said address and data bus to access one of said peripheral devices and wherein said signal is produced in response to detection both an address value and an address qualifier.

59. The apparatus according to claim 53, wherein said power control means is arranged to monitor addressing of a plurality of said peripheral devices, and wherein said means, responsive to the established timing interval exceeding a preset amount, is arranged to reduce power to at least one of said peripheral devices.

60. The apparatus according to claim 53, wherein said power control means comprises decode logic.

61. The apparatus according to claim 53, further comprising power connection to selected portions of said computer system and means to disable said power connection when said timing interval exceeds a preset amount.

62. The apparatus according to claim 53, wherein said means, responsive to the established timing interval exceeding said preset amount, comprises peripheral device powering off means.

63. The apparatus according to claim 62, further comprising means for powering on said peripheral devices powered off by said means responsive to the established timing interval exceeding said preset amount.

64. The apparatus according to claim 63, wherein said means for powering on includes a user activated switch.

65. The apparatus according to claim 63, further comprising means for disabling said means for powering on said peripheral devices when the remaining battery energy of a battery powered computer system is below a preset level.

66. The apparatus according to claim 53, further comprising means for reducing the present amount of said interval when the remaining battery energy of a battery powered computer system is below a first predetermined level.

67. The apparatus according to claim 66, further comprising means for further reducing the preset amount of said interval when the remaining battery energy is below a second predetermined level, less than said first predetermined level.

68. The apparatus according to claim 53, further comprising means responsive to a signal from the user for modifying the preset amount of said interval.

69. The apparatus according to claim 53, wherein said peripheral devices include one or more of a floppy disk drive, a keyboard, a modem, and a hard disk drive.

70. The apparatus according to claim 53, wherein said power control means and said means for establishing a timing interval are external to said peripheral devices.

71. A computer system according to claim 53, wherein said timing interval is initially established on powering up said computer system.

72. A computer system according to claim 53, further comprising system clock means for providing a system clock to portions of the circuitry forming the computer system, and means for disabling the system clock to the circuitry portions when said timing interval exceeds a preset amount.

73. A computer system according to claim 72, further comprising means operable to disable and to re-enable said means for establishing a timing interval.

74. A computer system according to claim 53, wherein, when operated by AC power, said power control means is disabled.

75. An apparatus for reducing power consumption of a computer system having addressable peripheral devices, the computer system including an address and data for enabling communication of information in said computer system, and a microprocessor for accessing each peripheral device by presenting its address on said address and data bus, said apparatus for reducing power consumption comprising:

a centralized and functionally separate power control circuit for monitoring said address and data bus, for detecting addressing of individual peripheral devices and for producing a signal indicative of any such addressing, said power control circuit receiving address and/or data bus information as it is presented on said address and data bus by said microprocessor, said power control circuit including

a timing circuit, responsive to said signal, for establishing a timing interval each time addressing of a peripheral device is detected; and

a power control effecting circuit, responsive to the established timing interval exceeding a preset amount, for removing and/or reducing power to the peripheral devices, to cause said computer system to enter a reduced power consumption state.

76. A computing system comprising:

a microprocessor providing addresses;

a bus coupled with said microprocessor for receiving addresses from said microprocessor and for communicating said received addresses;

at least one device peripheral to said microprocessor and coupled to said bus for receiving an address to access said peripheral device; and

a power control circuit functionally separate from said peripheral device for causing said computer system to switch between a normal power consumption mode and a reduced power consumption mode by generating the power reducing control signal upon receipt of an elapsed time signal, said power control circuit including

an access address detection circuit connected with said bus for determining when said central processing unit has generated a peripheral device access address signal and for generating a timer reset signal in response thereto, and

a timer circuit connected with said address detection circuit for receiving said timer reset signal, for determining the elapsed time since a timer reset signal was last received from said address detection circuit, and for generating the elapsed time signal when the elapsed time exceeds a predetermined elapsed time limit,

whereby the computer system assumes a reduced power consumption mode as a result of said power control circuit generating said power reducing control signal.

77. The computing system according to claim 76, wherein said power control circuit powers off said peripheral device.

78. The computing system according to claim 76, further comprising:

means for resetting said timing circuit when the computer system is powered up.

79. The computing system according to claim 76, further comprising:

means for adjusting said predetermined elapsed time limit when the power source voltage of the computer system drops below a predetermined level.

80. An apparatus for use with a computer system for reducing power consumption of the computer system, the computer system including various circuitry, portions of which are clocked, the apparatus comprising:

a central processing unit operable to generate peripheral device access address values;

an address and data bus coupled to said central processing unit for communicating address and data information in the computer system;

a plurality of peripheral devices coupled to said address and data bus, each said peripheral device being accessible over said address and data bus by use of an access address value associated with said peripheral device, each said peripheral device capable of being powered down; and

a power control circuit functionally separate from said peripheral devices for causing said computer system to switch between a normal power consumption mode and a reduced power consumption mode by generating a power reducing control signal and applying the power reducing control signal to cause said peripheral devices to power down upon receipt of an elapsed time signal, said power control circuit including

an access value detection circuit, in communication with said address and data bus, for receiving said address value and for generating a timer reset signal in response thereto, and

a timer circuit connected with said address value detection circuit for receiving said timer reset signal, for determining the elapsed time since a timer signal was last received from said address value detection circuit, and for generating the elapsed time signal when the elapsed time exceeds a predetermined elapsed time limit.

81. The apparatus according to claim 80, wherein the computer system is a battery powered computer system.

82. The apparatus according to claim 81, wherein said predetermined elapsed time limit is based on the charge level of the battery of the computer system.

83. The apparatus according to claim 82, wherein the computer system may receive power from an external AC source and further comprising:

means coupled to said power control circuit for disabling said power control circuit when power is being received from the external AC source.

84. The apparatus according to claim 83, further comprising:

means coupled to said power control circuit for reenabling said power control circuit when power is no longer being received from the AC source.

85. The apparatus according to claim 81, wherein said power control circuit causes each of said peripheral devices to be powered down.

86. The apparatus according to claim 81, further comprising:

means for starting said power control circuit when the computer system is powered up.

87. The apparatus according to claim 81, further comprising:

means for adjusting said predetermined elapsed time limit.

88. The apparatus according to claim 81, wherein at least one of said peripheral devices comprises one of a floppy disk drive, a keyboard, a modem, a hard disk drive, a serial communications device and a parallel communications device.

89. A battery powered computer system comprising:

an address and data bus for communicating address and data information in the computer system;

a plurality of peripheral devices coupled to said address and data bus, said peripheral devices being accessed over said address and data bus; and

a power control circuit functionally separate from said peripheral devices for causing said computer system to switch between a normal power consumption mode and a reduced power consumption mode by generating a power reducing control signal upon receipt of an elapsed time signal, said power control circuit including

an access address detection circuit for determining when said central processing unit has generated a peripheral device access address signal and for generating a time reset signal in response thereto, and

a timer circuit connected with said address detection circuit for receiving said timer reset signal, for determining the elapsed time since a timer reset signal was last received from said address detection circuit, and for generating the elapsed time signal when the elapsed time exceeds a predetermined elapsed time limit,

whereby the computer system assumes a reduced power consumption mode as a result of said power control circuit generating said power reducing control signal.

90. An apparatus for reducing power consumption of a computer system having addressable peripheral devices, the system including address and data bus means for enabling communication of information in said computer system, and microprocessor means for accessing each of said peripheral devices by presenting its coded address on said address and data bus means, said apparatus for reducing power comprising:

controllable power supply paths to individual ones of said peripheral devices for removing and/or reducing power to those peripheral devices; p1 a power control circuit to centrally monitor said address and data bus means, for centrally detecting in un-decoded form addressing of individual peripheral devices and for centrally producing a signal indicative of the access of any one of said peripheral devices thereof, said power control circuit including:

at least one timer responsive to said signal to establish a timing interval each time addressing of said one of said peripheral devices is detected; and

an operator, responsive to the established timing interval exceeding a preset amount, to operate the controllable power supply paths to individual peripheral devices to remove and/or reduce peripheral device power consumption, to cause said computer system to enter a reduced power consumption state.

91. A computer system comprising:

a microprocessor;

*at least one addressable device which draws, when the computer system is in a normal power consumption mode, an amount of power sufficient to support normal operation of said peripheral device and which draws, when the computer system is in a reduced power consumption mode, a below or zero amount of power;*

*a bus connected between said microprocessor and said device, said microprocessor operable to present on said bus an access address for said device;*

*address decode logic functionally separate from said device, said address device logic being responsive to the address for said device for generating an access signal;*

*means functionally separate from said device for commencing a timing interval of a defined period responsive to said access signal;*

*means functionally separate from said device and responsive to the reduction of the period remaining in said timing interval by a set time for reducing the power consumed by said device; and*

*means functionally separate from said device and responsive to the reduction of the period remaining in said timing interval by a set time for reducing the power consumed by said computer system.*

* * * * *